
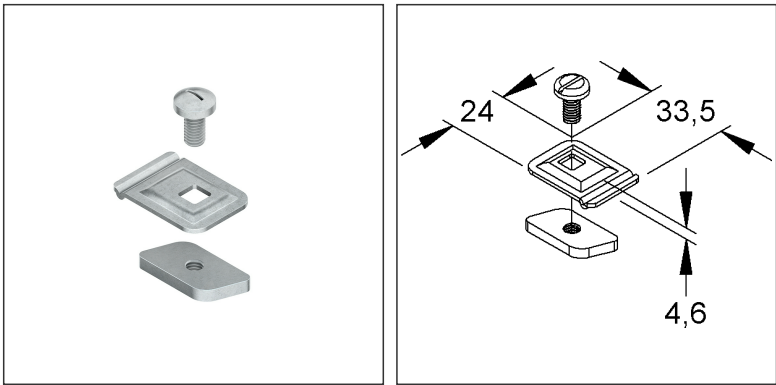


Barrier Strip Fastening Clamp

KLWC 16 F

EAN Code: 4013339570508
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

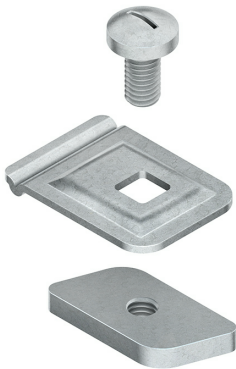

Article Description

Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 FK 6X10 E3, GSM 406 E3

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	27 g / pcs.
Weight in kg per 100	2,7 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KLWC 16 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	15.00 mm
Width	24.00 mm
Depth/length	33.50 mm

Packing Dimension

50 pieces = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	138.00 mm	Width	96.00 mm	Height	71.00 mm
Gross weight	1,41 kg	Volume	0,001 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

9000 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	293 kg	Volume	0,411 m³		
Min. Quantity	9.000.00 pcs.	Max. Quantity	9.000.00 pcs.		

Tender Text

Barrier strip fastening clamp, for fastening barrier strips in the trapezoidal cross-sectional thickness of the wide span cable trays, on wide span cable ladders with rungs of 16 mm slot width and on vertical cable ladders STL 60... with rungs of 16 mm slot width, including sliding nut GSM 406 E3 and flat head screw with slot FK 6X10 E3 made of stainless steel. Can be used at any point in the profile slot.

Please observe additional regulations for use in functional maintenance!

Used for : barrier strip RW...

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KLWC 16 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059