




Beam Clamp

pre-assembled

TKM 1

EAN Code: 4013339092741
Smallest packaging unit: 25 pcs.

the photorealistic images are to be considered as reference images

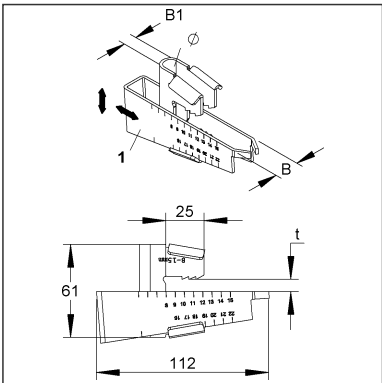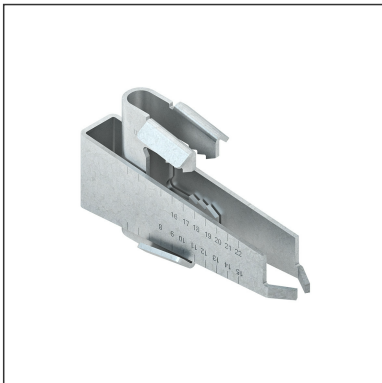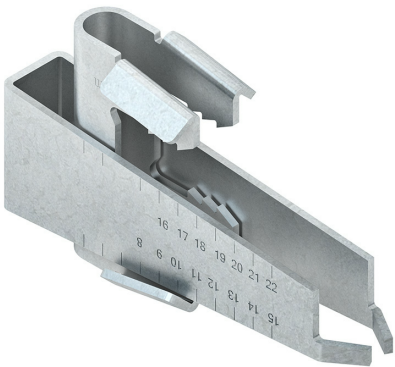

Article Description

Beam clamp, clamping range 8-20 mm, for threaded rod M8, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	165 g / pcs.
Weight in kg per 100	16 kg / 100pcs.

Physical Article Dimensions

Height	61.00 mm
Width	27.00 mm
Depth/length	112.00 mm

Technical Datasheet

Supporting structure

TKM 1

the photorealistic images are to be considered as reference images

Packing Dimension

25 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	275 mm	Width	180.00 mm	Height	130.00 mm
Gross weight	4,12 kg	Volume	0,006 m³		
Min. quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

Tender Text

Beam clamp, pre-assembled, for hammering onto beam flanges according to DIN 1025 with a minimum dimension of 8 - 20 mm and max. 14% inclination or parallel flanges with a flange thickness of 8 - 20 mm, for vertical suspensions by means of threaded rod, pre-assembly of the beam clamp with the threaded rod before assembly is possible.

The girder clamp may only be loaded perpendicularly to the girder!

Used for: threaded rod : ≤ M 8

Dimensions (approx. dimensions)

Height H : 61 mm

Width B : 17.5 mm

Length L : 112 mm

Girder flange thickness t : 8 - 20 mm

Vertical nominal load F : 2.0 kN

Material : Steel, pre-galvanised according to DIN EN 10346

Niedax Model No. : TKM 1

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098