


U-Clamp

with pressure trough

BF 16/3

EAN Code: 4013339063802
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

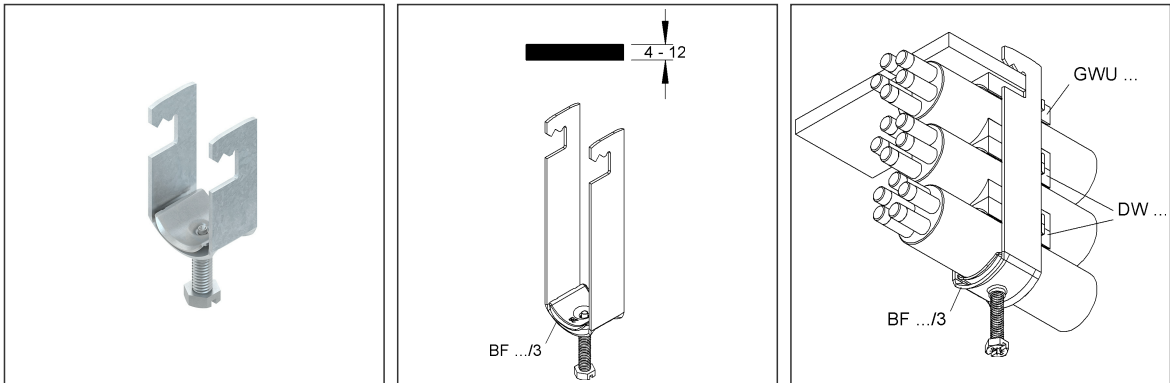

Article Description

U-clamp, for flat bars 4-12 mm, for 3 cables, Ø 14-16 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	58 g / pcs.
Weight in kg per 100	5,77 kg / 100pcs.

Technical Datasheet

U-clamps

BF 16/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	20.00 mm
Width	109.00 mm
Depth/length	29.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	250 mm	Width	250 mm	Height	120.00 mm
Volume	0,008 m³	Gross weight	6,15 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

6000 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	384 kg	Volume	0,960 m³		
Min. Quantity	6.000.00 pcs.	Max. Quantity	6.000.00 pcs.		

Tender Text

U-clamp, with toothed clamp foot, with pressure trough and M 6 pivot bolt with multiple drive, can be used on existing steel structures.
Counter tray GWU ... / GWS ... and double tray DW ... please order separately.
Used for: flat steel with a thickness of 4 - 12 mm
Dimensions (approx.)
Assignment one above the other: 3 cables
for cable Ø : 14 - 16 mm
Material bracket : steel, hot-dip galvanised in accordance with DIN EN ISO 1461
Material pressure trough : steel, pre-galvanized according to DIN EN 10346
NIEDAX model no. : BF 16/3
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098