

U-Clamp


with pressure trough

BF 46 AL

EAN Code: 4013339074907

Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

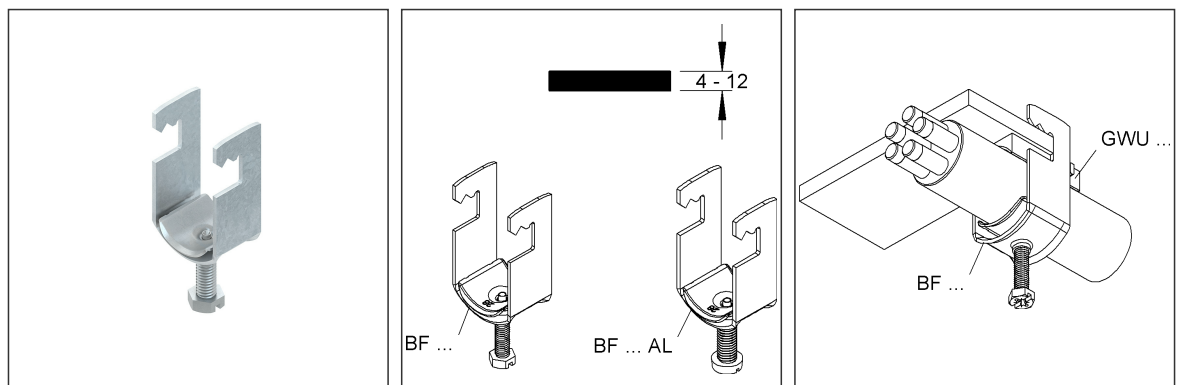

Article Description

U-clamp, for flat bars 4-12 mm, for 1 cable, Ø 42-46 mm, aluminium, with aluminium pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	34 g / pcs.
Weight in kg per 100	3,31 kg / 100pcs.

Physical Article Dimensions

Height	51.00 mm
Width	106.00 mm
Depth/length	42.00 mm

Technical Datasheet

U-clamps

BF 46 AL

the photorealistic images are to be considered as reference images

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	4,2 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

3600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	166 kg	Volume	0,960 m³		
Min. Quantity	3.600.00 pcs.	Max. Quantity	3.600.00 pcs.		

Tender Text

U-clamp, with toothed clamp foot, with pressure trough and M 8 pivot bolt to DIN EN ISO 1207 with multiple drive, can be used on existing steel structures. Counter trough GWU ... please order separately. Used for: flat steel with a thickness of 4 - 12 mm Dimensions (approx.) Assignment : 1 cable for cable-Ø : 42 - 46 mm Bracket material : aluminium Material pressure trough : aluminium NIEDAX model no. : BF 46 AL EP Material_____ EP Wage_____ Unit price/piece	
--	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	76169990