


U-Clamp

with pressure trough

BW 24/3

EAN Code: 4013339059904
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

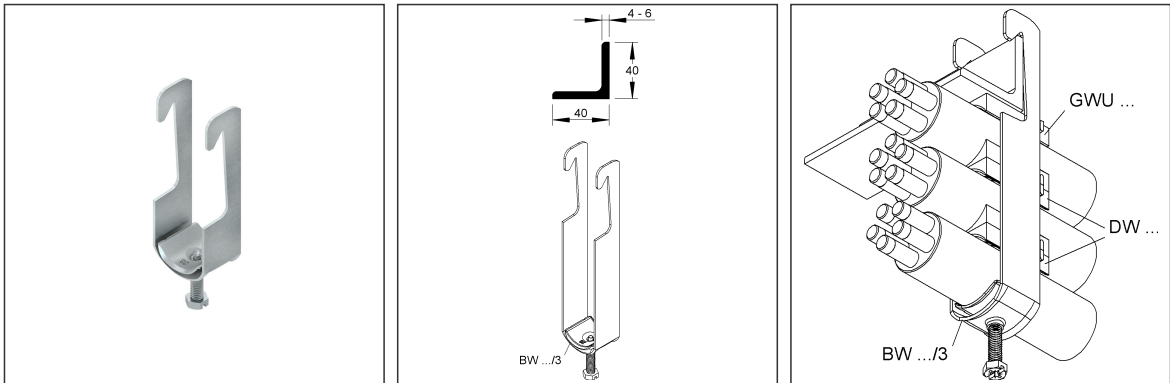

Article Description

U-clamp, for angle irons 40x40x4-6 mm, for 3 cables, Ø 22-24 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	87 g / pcs.
Weight in kg per 100	8,61 kg / 100pcs.

Technical Datasheet

U-clamps

BW 24/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	28.00 mm
Width	171.00 mm
Depth/length	29.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	9,5 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

3600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	357 kg	Volume	0,960 m³		
Min. Quantity	3.600.00 pcs.	Max. Quantity	3.600.00 pcs.		

Tender Text

U-clamp, for angle iron, with pressure trough and M 6 pivot bolt with multiple drive, can be used on isosceles and isosceles angle steel and U-iron.
Universal-Counter Trough GWU ... / GWS ... and double tray DW ... please order separately. please order separately.
Used for: equal and unequal-legged angle steel and U-iron with a maximum leg length of 40 mm and a thickness of 4 - 6 mm
Dimensions (approx. dimensions)
Assignment one above the other: 3 cables
for cable-Ø : 22 - 24 mm
Material bracket: steel, hot-dip galvanised in accordance with DIN EN ISO 1461
Material pressure tray : steel, strip galvanised to DIN EN 10346
NIEDAX model no. : BW 24/3
EP material_____ EP wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098