


U-Clamp

with plastic pressure trough

BWK 22

EAN Code: 4013339090402
Smallest packaging unit:100 pcs.

the photorealistic images are to be considered as reference images

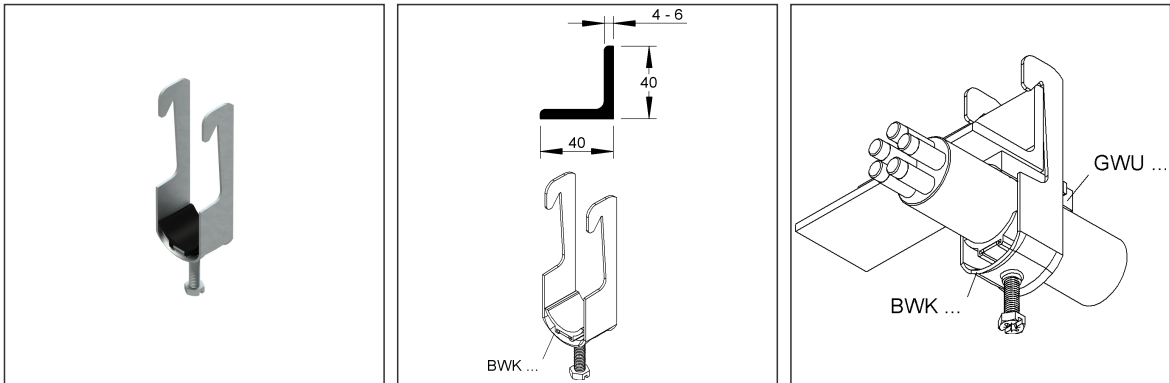

Article Description

U-clamp, for angle irons 40x40x4-6 mm, for 1 cable, Ø 16-22 mm, steel, hot dip galvanised DIN EN ISO 1461, w. plastics pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	53 g / pcs.
Weight in kg per 100	5,21 kg / 100pcs.

Technical Datasheet

U-clamps

BWK 22

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	26.00 mm
Width	117.00 mm
Depth/length	24.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	420 mm	Width	250 mm	Height	120.00 mm
Volume	0,013 m³	Gross weight	5,75 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

4900 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	297 kg	Volume	0,960 m³		
Min. Quantity	4.900.00 pcs.	Max. Quantity	4.900.00 pcs.		

Tender Text

U-clamp, for angle iron, including plastic pressure trough with UV protection and M 6 pivot bolt with multiple drive, can be used on equal and unequal-legged angle steel and U-iron.

Counter tray GWU ... / GWS ... please order separately.

Used for: equal and unequal-legged angle steel and U-iron with a maximum leg length of 40 mm and a thickness of 4 - 6 mm

Dimensions (approx. dimensions)

Assignment : 1 cable

for cable-Ø : 16 - 22 mm

Material bracket : steel, hot-dip galvanised in accordance with DIN EN ISO 1461

Material pressure tray : Polypropylene (PP), halogen-free, with UV protection, colour black

Material tray insert : steel, pre-galvanised according to DIN EN 10346

NIEDAX Model-No. : BWK 22

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098