


U-Clamp

with plastic pressure trough

BWK 46/2

EAN Code: 4013339092901
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

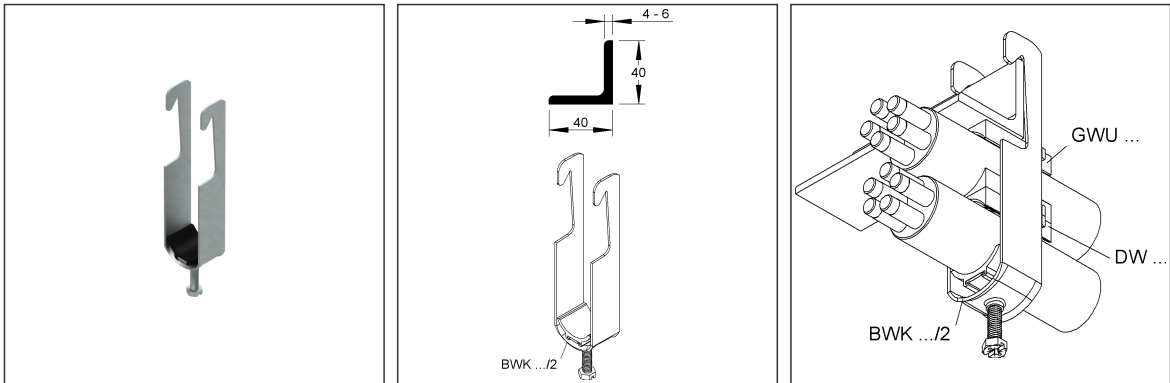

Article Description

U-clamp, for angle irons 40x40x4-6 mm, for 2 cables, Ø 42-46 mm, steel, hot dip galvanised DIN EN ISO 1461, w. plastics pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	148 g / pcs.
Weight in kg per 100	15 kg / 100pcs.

Technical Datasheet

U-clamps

BWK 46/2

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	51.00 mm
Width	200.00 mm
Depth/length	37.00 mm

Packing Dimension

50 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	8,24 kg		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

1800 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	312 kg	Volume	0,960 m³		
Min. Quantity	1.800.00 pcs.	Max. Quantity	1.800.00 pcs.		

Tender Text

U-clamp, for angle iron, including plastic pressure trough with UV protection and M 8 pivot bolt with multiple drive, can be used on equal and unequal-legged angle steel and U-iron.

Counter tray GWU ... and double tray DW ... please order separately.

Used for: equal and unequal-legged angle steel and U-iron with a maximum leg length of 40 mm and a thickness of 4 - 6 mm

Dimensions (approx. dimensions)

Assignment one above the other: 2 cables

for cable-Ø : 42 - 46 mm

Material bracket :steel, hot-dip galvanised in accordance with DIN EN ISO 1461

Material pressure tray : Polypropylene (PP), halogen-free, with UV protection, colour black

NIEDAX Model-No. : BWK 46/2

EP Material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098