



Cable U-clamp

with pressure trough

BA 30/3

EAN Code: 4013339055906
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

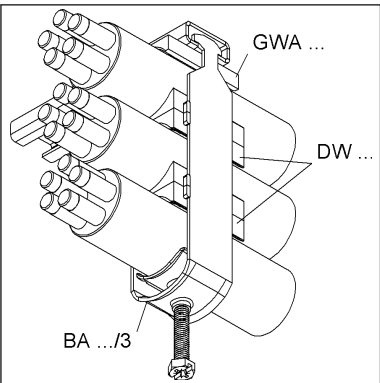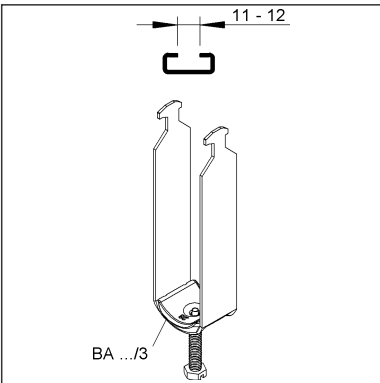

Article Description

Cable U-clamp, for 3 cables, Ø 28-30 mm, slot width 11-12 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	89 g / pcs.
Weight in kg per 100	8,83 kg / 100pcs.

Technical Datasheet

U-clamps

BA 30/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	34.00 mm
Width	157.00 mm
Depth/length	29.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	9,72 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

3600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	365 kg	Volume	0,960 m³		
Min. Quantity	3.600.00 pcs.	Max. Quantity	3.600.00 pcs.		

Tender Text

Hammerfoot clamp, with pressure trough and M 6 pivot bolt with multiple drive.
The clamp can only be inserted into the C-profile rail 2910... can only be inserted from the end of the profile.
Counter tray GWA ... / GWS ... and double tray DW... please order separately.
Used for: C-profile rails with 11 - 12 mm slot width
Dimensions (approx.)
Assignment one above the other: 3 cables
for cable Ø : 28 - 30 mm
Material hammerfoot stirrup : steel, hot-dip galvanised to DIN EN ISO 1461
Material Tray insert : steel, strip galvanised to DIN EN 10346
NIEDAX model no. : BA 30/3
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098