


Cable U-Clamp

with pressure trough

B 22/3

EAN Code: 4013339051205
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

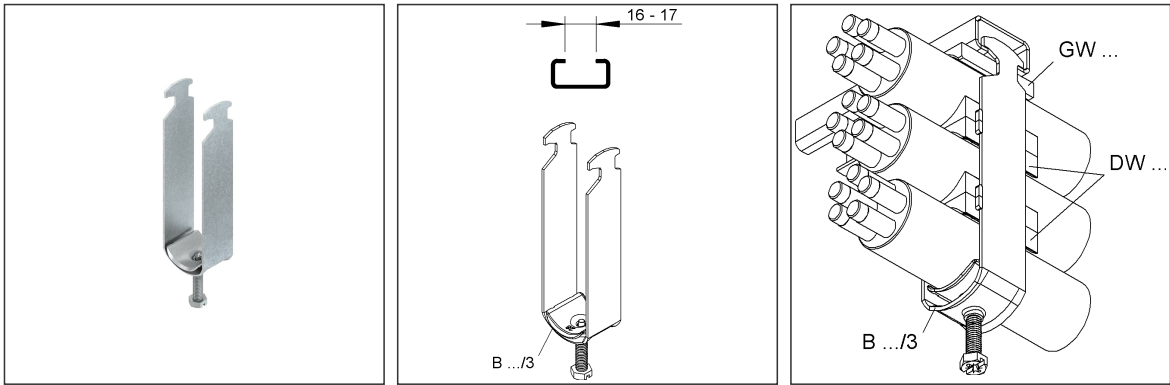

Article Description

Cable U-clamp, for 3 cables, Ø 20-22 mm, slot width 16-17 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	66 g / pcs.
Weight in kg per 100	6,58 kg / 100pcs.

Technical Datasheet

U-clamps

B 22/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	26.00 mm
Width	119.00 mm
Depth/length	29.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	420 mm	Width	250 mm	Height	120.00 mm
Volume	0,013 m³	Gross weight	7,12 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

4900 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	364 kg	Volume	0,960 m³		
Min. Quantity	4.900.00 pcs.	Max. Quantity	4.900.00 pcs.		

Tender Text

Hammerfoot clamp, with pressure trough and M 6 pivot bolt with multiple drive.
Counter trays GW ... / GWS ... and double tray DW... please order separately.
For use in functional maintenance, please observe additional regulations!
Used for: C-profile rails with 16 - 17 mm slot width
Dimensions (approx. dimensions)
Assignment one above the other: 3 cables
for cable Ø : 20 - 22 mm
Material Hammerfoot stirrup : steel, hot-dip galvanised to DIN EN ISO 1461
Material of pressure trough : steel, strip galvanised to DIN EN 10346
NIEDAX model no. : B 22/3
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098