


Cable U-clamp

with plastic pressure trough

BAK 34/2

EAN Code: 4013339089703  
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

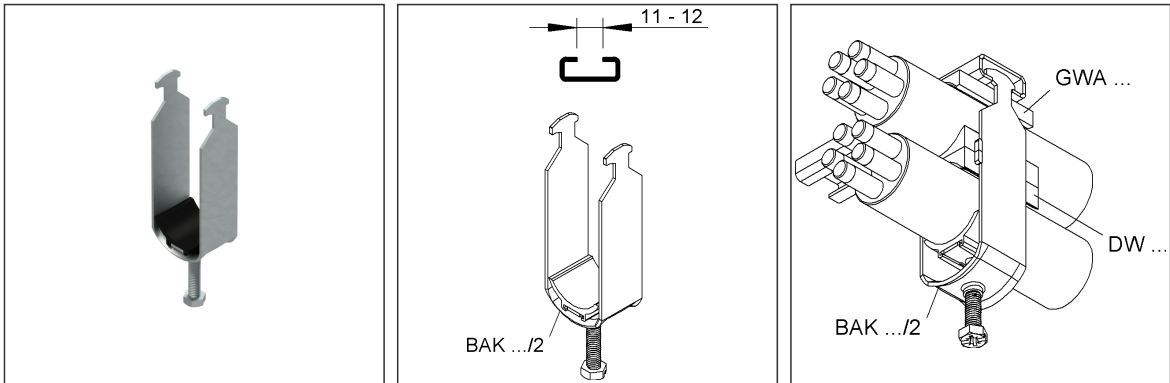

Article Description

Cable U-clamp, for 2 cables, Ø 30-34 mm, slot width 11-12 mm, steel, hot dip galvanised DIN EN ISO 1461, w. plastics pressure trough

Additional Price Information

|               |      |
|---------------|------|
| Article group | N08  |
| quantity unit | pcs. |

Weight

|                          |                  |
|--------------------------|------------------|
| Weight per quantity unit | 74 g / pcs.      |
| Weight in kg per 100     | 7,4 kg / 100pcs. |

# Technical Datasheet

## U-clamps

BAK 34/2

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 38.00 mm  |
| Width        | 134.00 mm |
| Depth/length | 24.00 mm  |

### Packing Dimension

|                              |             |                                     |             |                    |           |
|------------------------------|-------------|-------------------------------------|-------------|--------------------|-----------|
| <b>100 pieces = 1 carton</b> |             | ✓ VP1-smallest packaging unit ( PU) |             | ✓ VP1-preferred PU |           |
| Lenght                       | 480 mm      | Width                               | 280 mm      | Height             | 140.00 mm |
| Volume                       | 0,019 m³    | Gross weight                        | 8,29 kg     |                    |           |
| Min. quantity                | 100.00 pcs. | Max. Quantity                       | 100.00 pcs. |                    |           |

|                               |               |               |               |        |         |
|-------------------------------|---------------|---------------|---------------|--------|---------|
| <b>3600 pieces = 1 pallet</b> |               |               |               |        |         |
| Lenght                        | 1200 mm       | Width         | 800 mm        | Height | 1000 mm |
| Gross weight                  | 313 kg        | Volume        | 0,960 m³      |        |         |
| Min. Quantity                 | 3.600.00 pcs. | Max. Quantity | 3.600.00 pcs. |        |         |

### Tender Text

Hammerfoot clamp, including plastic pressure tray with UV protection and M 6 pivot bolt with multiple drive.  
The bracket clamp can only be inserted into the C-profile rail 2910... can only be inserted from the end of the profile.  
Counter trays GWA ... / GWS ... and double tray DW ... please order separately.  
Used for: C-profile rails with 11 - 12 mm slot width  
Dimensions (approx.)  
Assignment one above the other: 2 cables  
for cable Ø : 30 - 34 mm  
Material hammer foot stirrup : steel, hot-dip galvanised to DIN EN ISO 1461  
Material pressure trough : Polypropylene (PP), halogen-free, with UV protection, colour black  
Material tray insert : steel, strip galvanised to DIN EN 10346  
NIEDAX model no. : BAK 34/2  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73269098 |