


Cable U-clamp

with plastic pressure trough

BAK 82

EAN Code: 4013339088805
 Smallest packaging unit:50 pcs.

the photorealistic images are to be considered as reference images

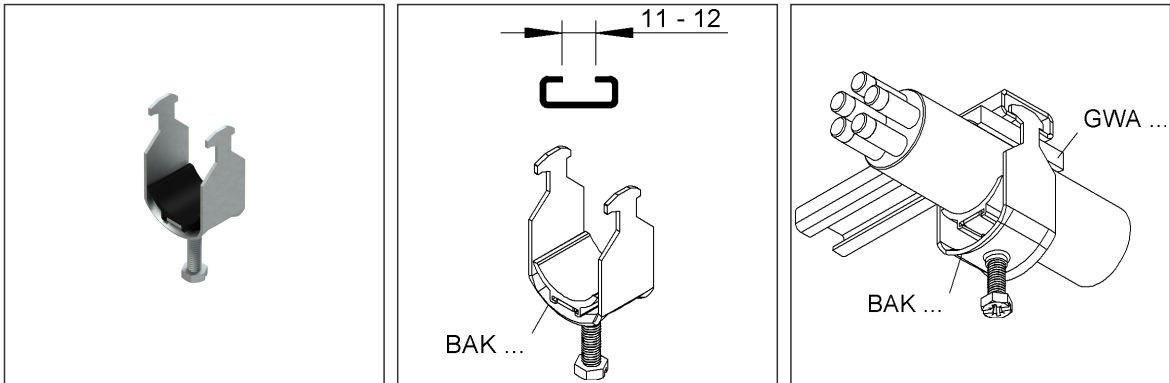

Article Description

Cable U-clamp, for 1 cable, Ø 76-82 mm, slot width 11-12 mm, steel, hot dip galvanised DIN EN ISO 1461, w. plastics pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	178 g/ pcs.
Weight in kg per 100	18 kg/ 100pcs.

Technical Datasheet

U-clamps

BAK 82

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	87.00 mm
Width	163.00 mm
Depth/length	40.00 mm

Packing Dimension

50 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	9,75 kg		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

1800 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	366 kg	Volume	0,960 m³		
Min. Quantity	1.800.00 pcs.	Max. Quantity	1.800.00 pcs.		

Tender Text

Hammerfoot clamp, including plastic pressure tray with UV protection and M 8 pivot bolt with multiple drive.
The clamp can only be inserted into the C-profile rail 2910... can only be inserted from the end of the profile.
Counter trays GWA ... please order separately.
Used for: C-profile rails with 11 - 12 mm slot width
Dimensions (approx.)
Assignment : 1 cable
for cable Ø : 76 - 82 mm
Material hammerfoot stirrup : steel, hot-dip galvanised to DIN EN ISO 1461
Material pressure trough : Polypropylene (PP), halogen-free, with UV protection, colour black
NIEDAX model no. : BAK 82
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098