


Cable U-Clamp

with plastic pressure trough

BK 34/2

EAN Code: 4013339086801
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

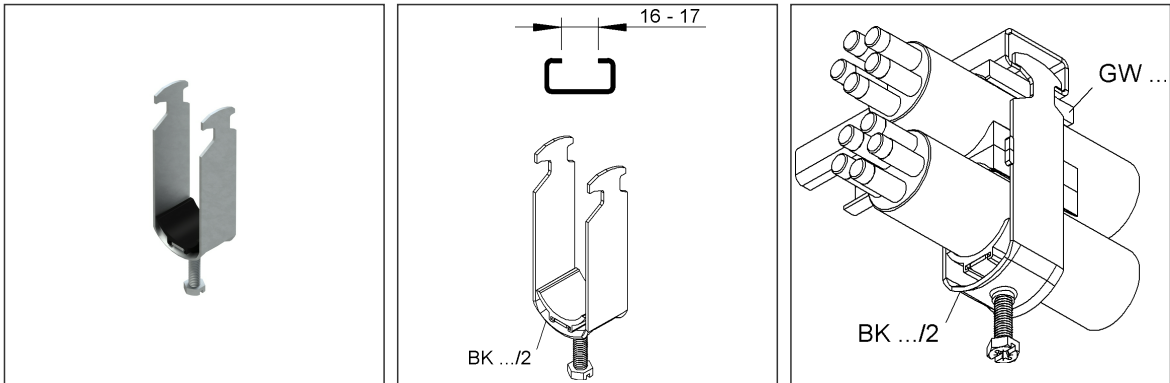

Article Description

Cable U-clamp, for 2 cables, Ø 30-34 mm, slot width 16-17 mm, steel, hot dip galvanised DIN EN ISO 1461, w. plastics pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	74 g / pcs.
Weight in kg per 100	7,3 kg / 100pcs.

Technical Datasheet

U-clamps

BK 34/2

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	38.00 mm
Width	126.00 mm
Depth/length	24.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Volume	0,019 m³	Gross weight	8,19 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

3600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	310 kg	Volume	0,960 m³		
Min. Quantity	3.600.00 pcs.	Max. Quantity	3.600.00 pcs.		

Tender Text

Hammerfoot clamp, including plastic pressure trough with UV protection and M 6 pivot bolt with multiple drive.
Counter tray GW ... /GWS ... and double tray DW... please order separately.
Used for: C-profile rails with 16 - 17 mm slot width
Dimensions (approx. dimensions)
Assignment one above the other: 2 cables
for cable Ø : 30 - 34 mm
Material hammerfoot stirrup : steel, hot-dip galvanised to DIN EN ISO 1461
Material pressure trough : Polypropylene (PP), halogen-free, with UV protection, colour black
Material tray insert : steel, strip galvanised to DIN EN 10346
NIEDAX model no. : BK 34/2
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098