


Conduit Clamp

MIRS 30 F

EAN Code: 4013339907229
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

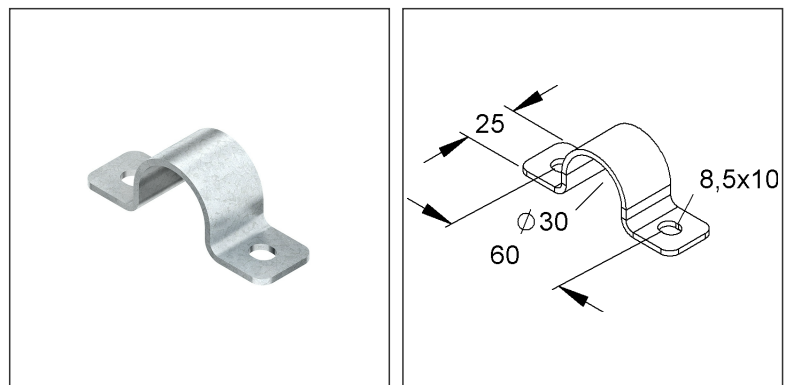

Article Description

Conduit clamp, Ø 30 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	60 g / pcs.
Weight in kg per 100	6 kg / 100pcs.

Physical Article Dimensions

Height	29.50 mm
Width	85.00 mm
Depth/length	25.00 mm

Technical Datasheet

Machine installation conduit

MIRS 30 F

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	154.00 mm	Width	138.00 mm	Height	71.00 mm
Gross weight	1,26 kg	Volume	0,002 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

2940 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	226 kg	Volume	0,411 m³		
Min. Quantity	2.940.00 pcs.	Max. Quantity	2.940.00 pcs.		

Tender Text

Conduit clamp, double-lobe, with fastening holes, for fastening machine installation conduits. Used for : machine installation conduit MI 30... Dimensions (approx. dimensions) Height H x width W x length L : 29.5 x 25 x 85 mm Fastening holes : 8.5 x 10 mm centre distance : 60 mm for conduit-Ø : 30 mm Material : steel, hot dip galvanised acc. to DIN EN ISO 1461 NIEDAX model no. : MIRS 30 F EP material_____ EP wage_____ Unit price/piece	
--	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098