



Conduit Clamp

MIRS 60 F

EAN Code: 4013339907946

Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

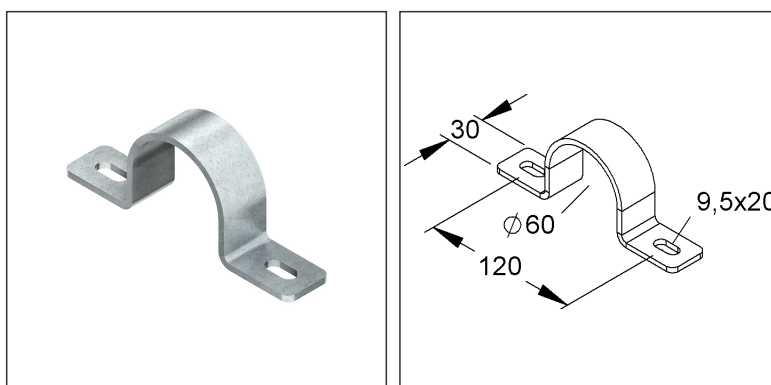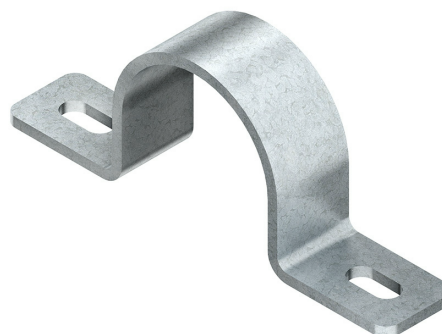

Article Description

Conduit clamp, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	238 g / pcs.
Weight in kg per 100	24 kg / 100pcs.

Physical Article Dimensions

Height	61.00 mm
Width	160.00 mm
Depth/length	30.00 mm

Technical Datasheet

Machine installation conduit

MIRS 60 F

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	260 mm	Width	185.00 mm	Height	120.00 mm
Gross weight	5,03 kg	Volume	0,006 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

720 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	221 kg	Volume	0,411 m³		
Min. Quantity	720.00 pcs.	Max. Quantity	720.00 pcs.		

Tender Text

Conduit clamp, double-lobe, with fastening holes, for fastening machine installation conduits.	
Used for : machine installation conduit MI 60... machine installation conduit MIG 60... machine installation conduit connection MIA 60...	
Dimensions (approx. dimensions)	
Height H x width W x length L : 61 x 30 x 160 mm	
Fastening holes : 9.5 x 20 mm	
centre distance : 120 mm	
for conduit-Ø : 60 mm	
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461	
NIEDAX Model No. : MIRS 60 F	
EP Material_____ EP Wage_____	
Unit price/piece	

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098