


Universal-U-Clamp

with pressure trough

BU 16/2

EAN Code: 4013339067008
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

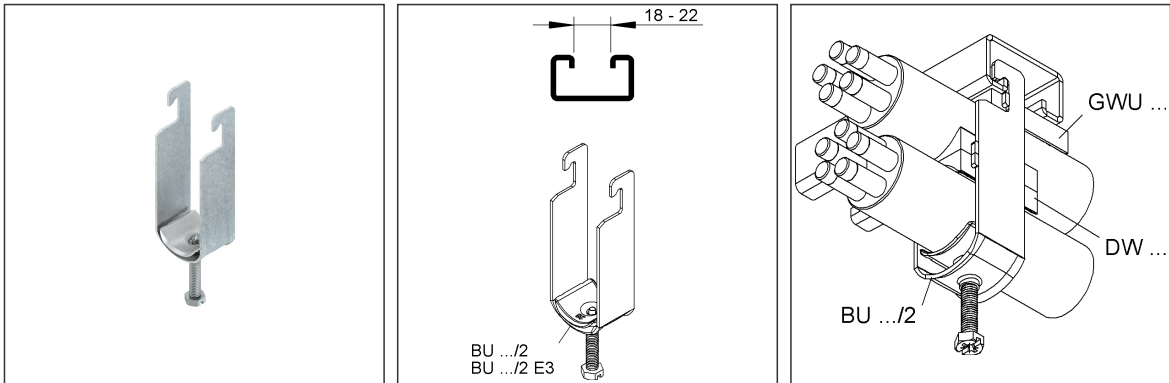

Article Description

Universal-U-clamp, for 2 cables, Ø 14-16 mm, slot width 18-22 mm, steel, hot dip galvanised DIN EN ISO 1461, with steel pressure trough

Additional Price Information

Article group	N08
quantity unit	pcs.

Weight

Weight per quantity unit	44 g / pcs.
Weight in kg per 100	4,37 kg / 100pcs.

Technical Datasheet

U-clamps

BU 16/2

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	20.00 mm
Width	89.00 mm
Depth/length	29.00 mm

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	250 mm	Width	250 mm	Height	100.00 mm
Volume	0,006 m³	Gross weight	4,74 kg		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

8400 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	413 kg	Volume	0,960 m³		
Min. Quantity	8.400.00 pcs.	Max. Quantity	8.400.00 pcs.		

Tender Text

Universal U-clamp, with pressure trough and M 6 pivot bolt with multiple drive.
Counter tray GWU ... / GWS ... and double tray DW ... please order separately.
Please observe additional regulations for use in functional maintenance!
Used for: C-profile rails with 18 - 22 mm slot width
Dimensions (approx. dimensions)
Assignment one above the other: 2 cables
for cable Ø : 14 - 16 mm
Material bracket : steel, hot-dip galvanised in accordance with DIN EN ISO 1461
Material pressure trough : steel, pre-galvanised according to DIN EN 10346
NIEDAX model no. : BU 16/2
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098