

Electrical Conduit

MI 60/6 E3


EAN Code: 4013339908509

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

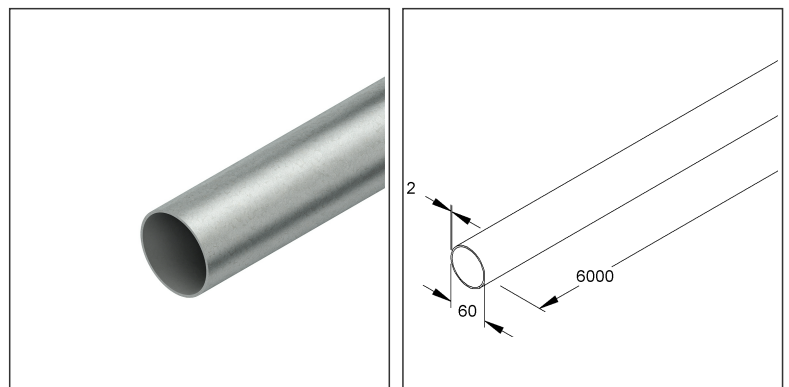

Article Description

Machine installation conduit, Ø 60 mm, length 6000 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,080 kg / m
Weight in kg per 100	308 kg / 100m

Physical Article Dimensions

Height	60.00 mm
Width	60.00 mm
Depth/length	6000 mm
Diameter	60.00 mm

Technical Datasheet

Machine installation conduit

MI 60/6 E3

the photorealistic images are to be considered as reference images

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	60.00 mm	Height	60.00 mm
Gross weight	18 kg	Volume	0,017 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

222 meters = 1 bundle					
Lenght	6000 mm	Width	360 mm	Height	420 mm
Gross weight	684 kg	Volume	0,907 m³		
Min. Quantity	222.00 m	Max. Quantity	222.00 m		

Tender Text

Machine installation conduit, for the cable protection pipe system. Dimensions (approx. dimensions) Pipe-Ø : 60 mm Material thickness t : 2 mm Delivery length L : 6000 mm Material : stainless steel, material no. 1.4301, AISI 304 NIEDAX Model no. : MI 60/6 E3 EP Material_____ EP Wage_____ Unit price/metre	
---	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	73063012

Related items

Connector

Model No.	Description
MIK 60 E3	Coupling, Ø 60 mm, stainless steel, material code: 1.4301, AISI 304
MIKG 60 E3	Coupling, perforated, Ø 60 mm, stainless steel, material code: 1.4301, AISI 304