

Elbow 45°




with unperforated side profiles, but with connector perforations

KLMUBB 40.1000 F

EAN Code: 4013339935215

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

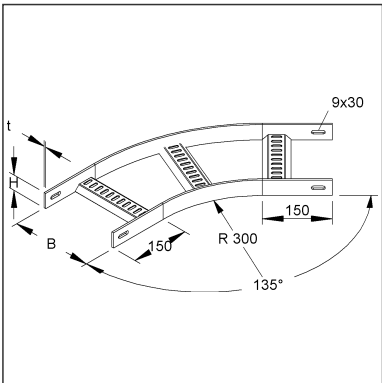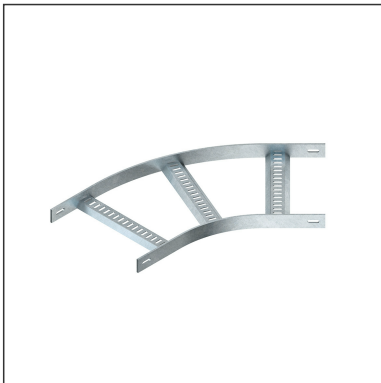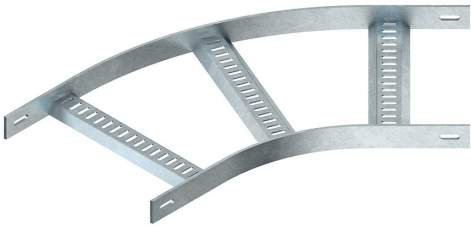

Article Description

Elbow 45°, 40x1000 mm, t=5,0 mm, steel, hot dip galvanised DIN EN ISO 1461

Excl. Accessories

exclusive bolting

Please order the necessary fastening accessories separately: FLM 8X25 F

Additional Price Information

Article group

N13

quantity unit

pcs.

Weight

Weight per quantity unit

6,357 kg / pcs.

Weight in kg per 100

636 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KLMUBB 40.1000 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	40.00 mm
Width	1204 mm
Depth/length	1182 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1183 mm	Width	1204 mm	Height	40.00 mm
Gross weight	6,36 kg	Volume	0,057 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Elbow 45°, with unperforated side rails, with connecting perforation for connection and welded-in trapezoidal perforated rungs, for marine cable ladders, for creating 45° horizontally angled marine cable ladder course. Please order fastening accessories for the connection separately.

Used for : Marine cable ladder/vertical cable ladder KLMUL 40...

Dimensions (approx. dimensions)

Height H x width W (inside) : 40 x 1000 mm

Material thickness t : 5 mm

Inside radius R : 300 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model no. : KLMUBB 40.1000 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059