


Conduit Elbow 45°

MIB 6045 F

EAN Code: 4013339907366

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

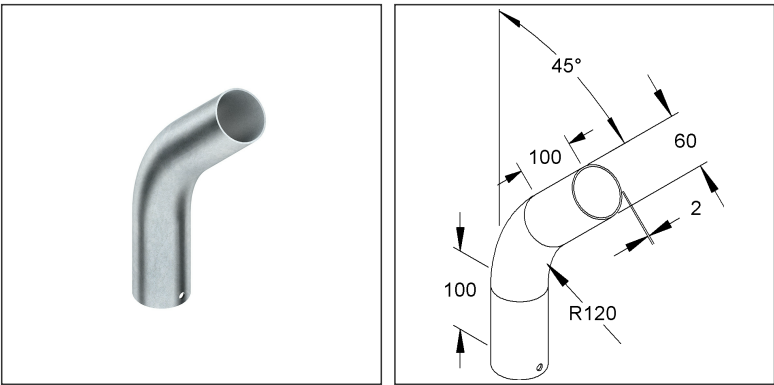

Article Description

Conduit elbow 45°, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,000 kg / pcs.
Weight in kg per 100	100 kg / 100pcs.

Physical Article Dimensions

Height	298 mm
Width	166.00 mm
Depth/length	60.00 mm

Technical Datasheet

Machine installation conduit

MIB 6045 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	60.00 mm	Width	166.00 mm	Height	298 mm
Gross weight	1 kg	Volume	0,003 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

300 pieces = 1					
Lenght	1230 mm	Width	840 mm	Height	970 mm
Gross weight	370 kg	Volume	1,002 m³		
Min. Quantity	300.00 pcs.	Max. Quantity	300.00 pcs.		

Tender Text

Conduit elbow 45°, for cable protection conduit system.
Used for : machine installation conduit MI 60...
machine installation conduit MIG 60...
installation conduit connection MIA 60...
Dimensions (approx. dimensions)
Pipe-Ø : 60 mm
Material thickness t : 2 mm
Angle : 45°
Radius R : 120 mm
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : MIB 6045 F
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73079980

Related items

Connector

Model No.	Description
MIK 60 F	Coupling, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461
MIKG 60 F	Coupling, perforated, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461