



Outside Elbow 90°

with screw connector perforation, with cover

LEAC 60.100

EAN Code: 4013339533701
Smallest packaging unit: 8 pcs.

the photorealistic images are to be considered as reference images

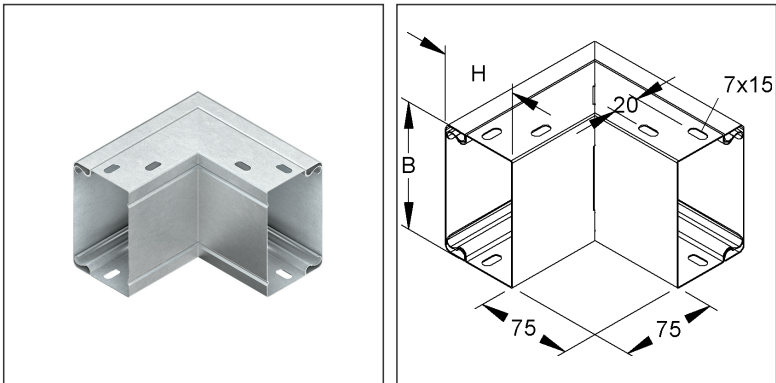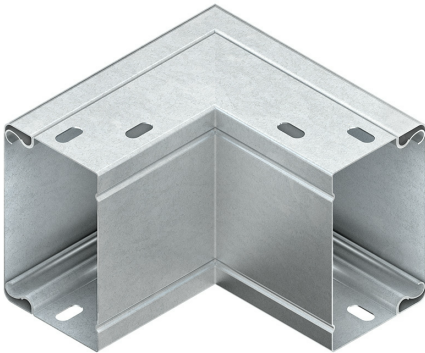

Article Description

Outside elbow 90° with screw connector perforation, with cover, 60x100, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	pcs.

Weight

Weight per quantity unit	513 g / pcs.
Weight in kg per 100	51 kg / 100pcs.

Technical Datasheet

Cable protection duct

LEAC 60.100

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	100.00 mm
Width	136.00 mm
Depth/length	136.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	136.00 mm	Width	136.00 mm	Height	100.00 mm
Gross weight	0,51 kg	Volume	0,002 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

8 pieces = 1 carton		✓ VP2-preferred PU			
Lenght	420 mm	Width	250 mm	Height	120.00 mm
Gross weight	4,65 kg	Volume	0,013 m³		
Min. Quantity	8.00 pcs.	Max. Quantity	8.00 pcs.		

Tender Text

Outside elbow 90° for industrial duct, with snap-on cover, duct bottom part unperforated but with screw connector perforations in the sides, equipotential bonding of the covers is automatic when snapped on, accessories for equipotential bonding, two splice plates LIV 60 per joint, must be ordered separately.
VDE certified!
for industrial ducts : LUE... LI...
Dimensions (approx. dimensions) H x W (approx. dimensions) : 60 x 100 mm
Leg length inside : 75 mm
Material : steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model No. : LEAC 60.100
EP Material_____ EP Lohn_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
LIV 60	Universal-splice plate, asymmetrical, steel, pre-galvanised according to DIN EN 10346, incl. accessories