

## Vertical Outside Elbow 90°



vertical, consisting of oval, closed tubular profile rungs and welded, closed, oval rungs

**KROF 60.125 F**

EAN Code: 4013339849802

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

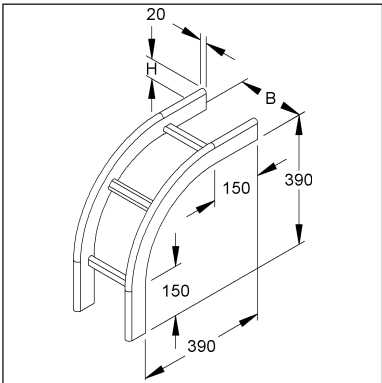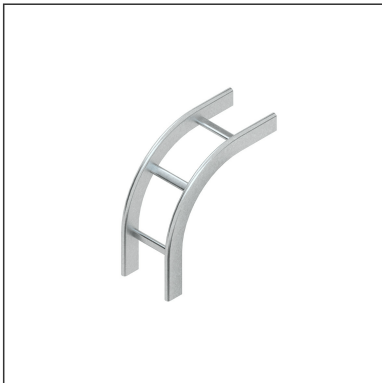

### Article Description

Vertical outside elbow 90°, vertical, 60x100 mm, with closed oval rung, steel, hot dip galvanised DIN EN ISO 1461

### Additional Price Information

|               |      |
|---------------|------|
| Article group | N13  |
| quantity unit | pcs. |

### Weight

|                          |                  |
|--------------------------|------------------|
| Weight per quantity unit | 1,956 kg / pcs.  |
| Weight in kg per 100     | 196 kg / 100pcs. |

# Technical Datasheet

## Cable Ladder System

### KROF 60.125 F

the photorealistic images are to be considered as reference images

#### Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 450 mm    |
| Width        | 100.00 mm |
| Depth/length | 450 mm    |

#### Packing Dimension

|                          |           |                                     |           |        |        |
|--------------------------|-----------|-------------------------------------|-----------|--------|--------|
| <b>1 piece = 1 piece</b> |           | ✓ VP1-smallest packaging unit ( PU) |           |        |        |
| Lenght                   | 450 mm    | Width                               | 100.00 mm | Height | 450 mm |
| Gross weight             | 1,96 kg   | Volume                              | 0,020 m³  |        |        |
| Min. quantity            | 1.00 pcs. | Max. Quantity                       | 1.00 pcs. |        |        |

#### Tender Text

Vertical outside elbow 90°, side beams made of hollow sections, with welded-in, closed, oval rungs, for creating vertical 90° drops. Please order splice plate KRLV 60 F separately. for Allround cable ladder : KRC...

Dimensions (approx. dimensions) H x W : 60 x 100 mm Outer dimensions : 450 mm

Inner beam radius R : 240 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model no. : KROF 60.125 F

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

#### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

#### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tariff number   | 73089059 |

#### Related items

#### Connector

| Model No. | Description                                             |
|-----------|---------------------------------------------------------|
| KRLV 60 F | Splice plate, steel, hot dip galvanised DIN EN ISO 1461 |