



Inside Elbow 45°

with screw connector perforation, with cover

LEIB 60.200

EAN Code: 4013339534708
Smallest packaging unit: 4 pcs.

the photorealistic images are to be considered as reference images

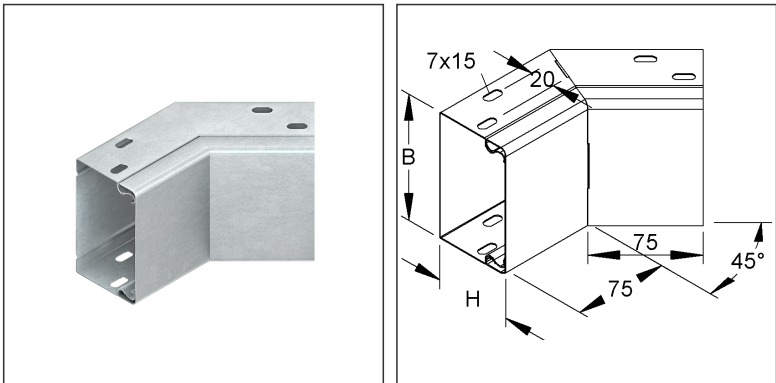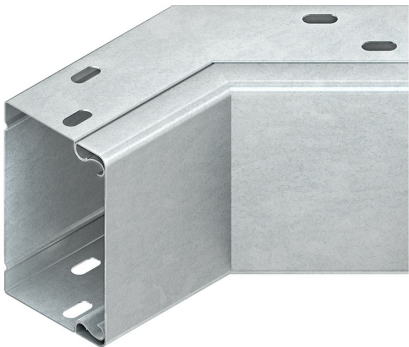

Article Description

Inside elbow 45° with cover, 60x200 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	pcs.

Weight

Weight per quantity unit	740 g / pcs.
Weight in kg per 100	74 kg / 100pcs.

Physical Article Dimensions

Height	200.00 mm
Width	114.00 mm
Depth/length	171.00 mm

Technical Datasheet

Cable protection duct

LEIB 60.200

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	171.00 mm	Width	114.00 mm	Height	200.00 mm
Gross weight	0,74 kg	Volume	0,004 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

4 pieces = 1 carton		✓ VP2-preferred PU			
Lenght	350 mm	Width	180.00 mm	Height	110.00 mm
Gross weight	3,28 kg	Volume	0,007 m³		
Min. Quantity	4.00 pcs.	Max. Quantity	4.00 pcs.		

Tender Text

Vertical inside elbow 45° for industrial duct, with snap-on cover, duct bottom part unperforated but with screw connector perforations in the sides, the equipotential bonding of the covers is carried out automatically when snapped on, accessories for equipotential bonding, two splice plates LIV 60 per joint, must be ordered separately.

VDE certified!

for industrial ducts : LUE... LI...

Dimensions (approx. dimensions) H x W (approx. dimensions) : 60 x 200 mm

Leg length inside : 75 mm

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : LEIB 60.200

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
LIV 60	Universal-splice plate, asymmetrical, steel, pre-galvanised according to DIN EN 10346, incl. accessories