


Coupler

MIK 60 F

EAN Code: 4013339907465
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

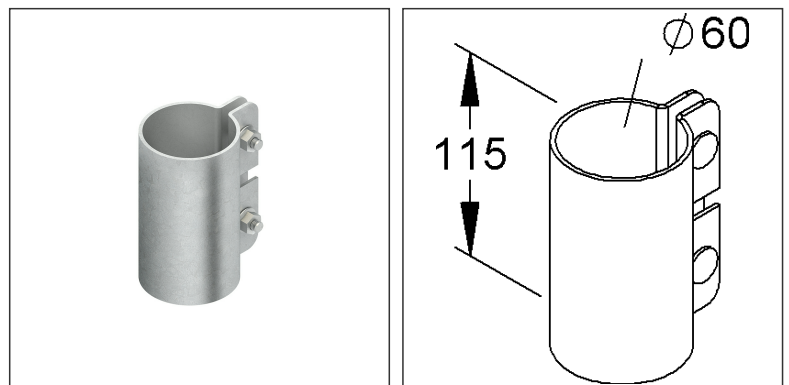

Article Description

Coupling, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	625 g / pcs.
Weight in kg per 100	62 kg / 100pcs.

Physical Article Dimensions

Height	90.60 mm
Width	66.00 mm
Depth/length	115.00 mm

Technical Datasheet

Machine installation conduit

MIK 60 F

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Gross weight	13 kg	Volume	0,019 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	416 kg	Volume	0,960 m³		
Min. Quantity	600.00 pcs.	Max. Quantity	600.00 pcs.		

Tender Text

Coupling, for the connection of longitudinally aligned machine installation conduits, for the connection of conduit elbows and for fastening to the floor connection.

Used for : machine installation conduit MI 60...

machine installation conduit MIG 60...

installation conduit connection MIA 60...

Dimensions (approx. dimensions)

Coupling Ø : 60 mm

Coupling length : 115 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No.: MIK 60 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079980