


Coupler

perforated

MIKG 30 E3

EAN Code: 4013339908202
Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

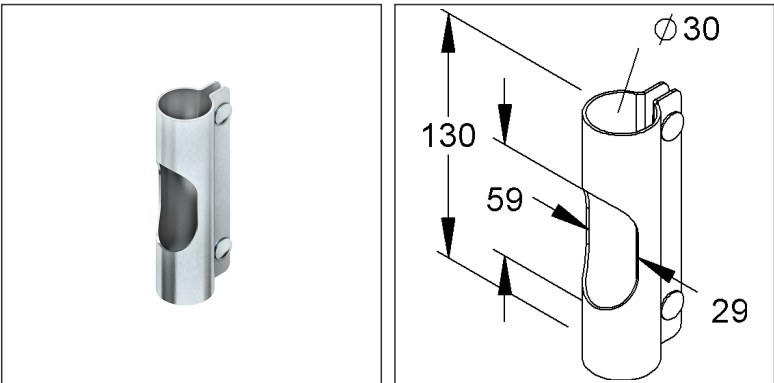

Article Description

Coupling, perforated, Ø 30 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	189 g / pcs.
Weight in kg per 100	19 kg / 100pcs.

Physical Article Dimensions

Height	49.10 mm
Width	34.00 mm
Depth/length	130.00 mm

Technical Datasheet

Machine installation conduit

MIKG 30 E3

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	260 mm	Width	185.00 mm	Height	120.00 mm
Gross weight	4,06 kg	Volume	0,006 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

720 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	186 kg	Volume	0,411 m³		
Min. Quantity	720.00 pcs.	Max. Quantity	720.00 pcs.		

Tender Text

Coupling, perforated, with connection opening for fitting / outlet of cables, for connection of longitudinally aligned machine installation conduits, for connection of conduit elbows as well as for fastening to the floor connection. Used for : machine installation conduit MI 30...	
Dimensions (approx. dimensions)	
Coupling Ø : 30 mm	
Hole L x W : 59 x 29 mm	
Coupling length : 130 mm	
Material : stainless steel, material no. 1.4301, AISI 304	
NIEDAX Model no. : MIKG 30 E3	
EP Material_____ EP Wage_____	
Unit price/piece	

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73072210