


Coupler

perforated

MIKG 30 F

EAN Code: 4013339907007
Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

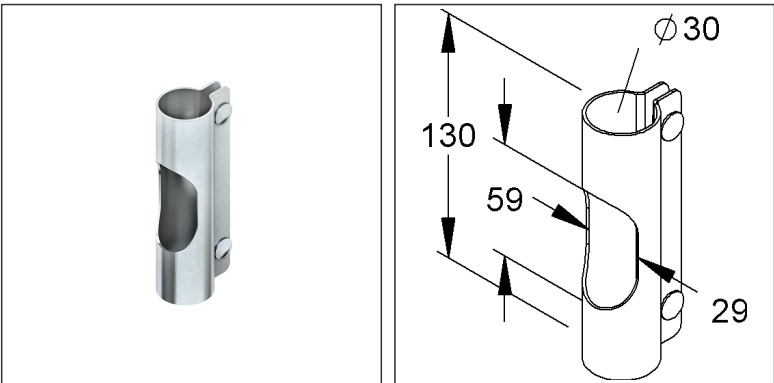

Article Description

Coupling, perforated, Ø 30 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	203 g / pcs.
Weight in kg per 100	20 kg / 100pcs.

Physical Article Dimensions

Height	49.10 mm
Width	34.00 mm
Depth/length	130.00 mm

Technical Datasheet

Machine installation conduit

MIKG 30 F

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	260 mm	Width	185.00 mm	Height	120.00 mm
Gross weight	4,34 kg	Volume	0,006 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

1800 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	405 kg	Volume	0,960 m³		
Min. Quantity	1.800.00 pcs.	Max. Quantity	1.800.00 pcs.		

Tender Text

Coupling, perforated, with connection opening for fitting / outlet of cables, for connection of longitudinally aligned machine installation conduits, for connection of conduit elbows as well as for fastening to the floor connection. Used for : machine installation conduit MI 30...	
Dimensions (approx. dimensions)	
Coupling Ø : 30 mm	
Hole L x W : 59 x 29 mm	
Coupling length : 130 mm	
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461	
NIEDAX Model No. : MIKG 30 F	
EP Material_____ EP Wage_____	
Unit price/piece	

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079980