

Coupler


perforated

MIKG 60 F

EAN Code: 4013339907489

Smallest packaging unit: 10 pcs.

the photorealistic images are to be considered as reference images

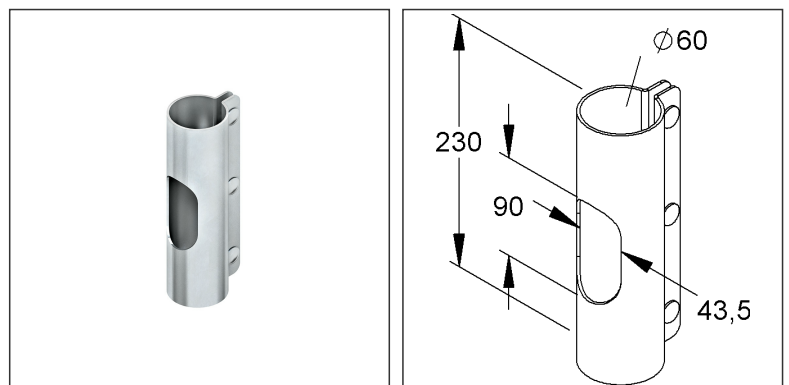

Article Description

Coupling, perforated, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,169 kg / pcs.
Weight in kg per 100	117 kg / 100pcs.

Physical Article Dimensions

Height	90.60 mm
Width	66.00 mm
Depth/length	230 mm

Technical Datasheet

Machine installation conduit

MIKG 60 F

the photorealistic images are to be considered as reference images

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	420 mm	Width	250 mm	Height	120.00 mm
Gross weight	12 kg	Volume	0,013 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

350 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	443 kg	Volume	0,960 m³		
Min. Quantity	350.00 pcs.	Max. Quantity	350.00 pcs.		

Tender Text

Coupling, perforated, with connection opening for fitting / outlet of cables, for connection of longitudinally aligned machine installation conduits, for connection of conduit elbows as well as for fastening to the bottom connection. Used for : machine installation conduit MI 60... machine installation conduit MIG 60... installation conduit connection MIA 60... Dimensions (approx. dimensions) Coupling Ø : 60 mm Hole L x W : 90 x 43.5 mm Coupling length : 230 mm Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461 NIEDAX Model No. : MIKG 60 F EP Material_____ EP Wage_____ Unit price/piece	
---	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079980