

Tilting Dowel


Threaded rod, incl. brass lens countersunk nut with slot for screwing in the threaded shank

222 DS

EAN Code: 4013339154401

Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

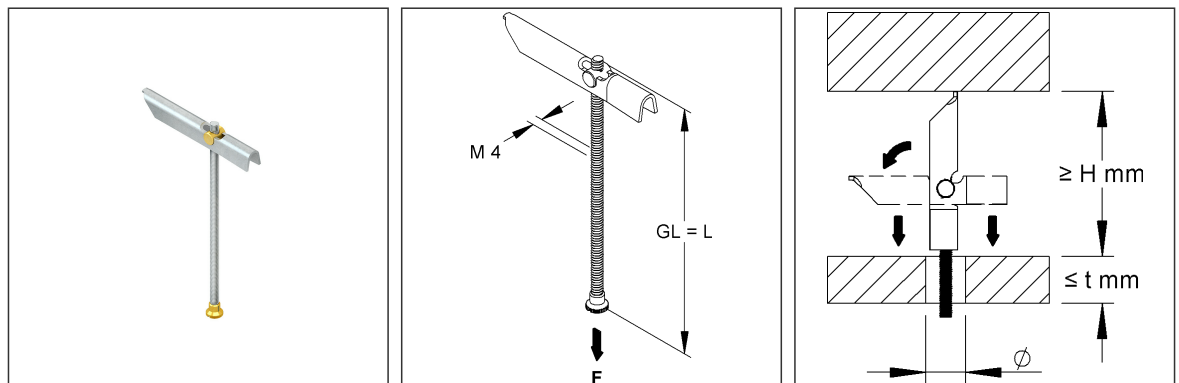

Article Description

Tilting dowel with threaded rod M4, thread length 100 mm, steel, elec. galvanised acc. to DIN EN ISO 2081/4042, blue passivated

Additional Price Information

Article group	N14
quantity unit	pcs.

Weight

Weight per quantity unit	21 g / pcs.
Weight in kg per 100	2,04 kg / 100pcs.

Technical Datasheet

Dowels

222 DS

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	8.86 mm
Width	67.00 mm
Depth/length	100.00 mm

Packing Dimension

50 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	138.00 mm	Width	96.00 mm	Height	71.00 mm
Gross weight	1,07 kg	Volume	0,001 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

500 pieces = 1 covering box					
Lenght	370 mm	Width	282 mm	Height	100.00 mm
Gross weight	11 kg	Volume	0,010 m³		
Min. Quantity	500.00 pcs.	Max. Quantity	500.00 pcs.		

24000 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	538 kg	Volume	0,960 m³		
Min. Quantity	24.000.00 pcs.	Max. Quantity	24.000.00 pcs.		

Tender Text

Tilting dowel with threaded rod, electro-galvanised acc. to DIN EN ISO 19598, blue passivated, the shaft is made of brass material, for use on cavity ceilings and walls, including brass special nut with slot for screwing in the threaded shaft.

The load values include a safety factor of 5.

The load capacity data only apply if the load capacity of the substrate is sufficient.

Threaded rod : M 4

Threaded rod length : 100 mm

Total length : 100 mm

Drill hole Ø : 12 mm

Required cavity depth : 70 mm

Max. panel thickness : 40 mm

Load capacity perm. F : 0.4 kN

NIEDAX Model No. : 222 DS

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Dowels

222 DS

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73181900