



**Cable Ladder**

rung spacing 300 mm, with continuously perforated side profiles, with riveted, upwardly open rungs made of C-profiles with 11 mm slot width

**KL 60.303/3**

EAN Code: 4013339914562  
 Smallest packaging unit:3 m  
 quantity unit:m M

the photorealistic images are to be considered as reference images

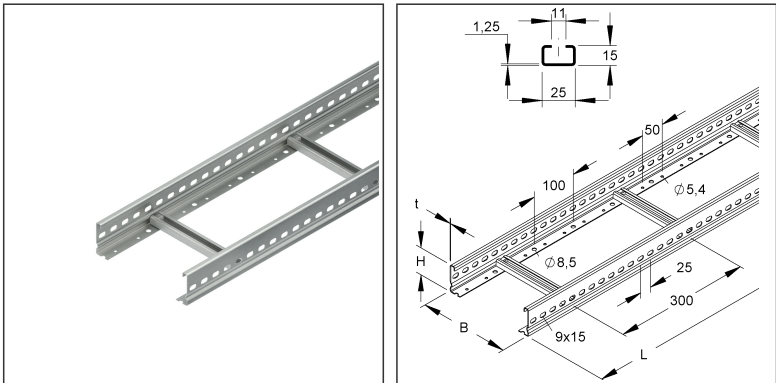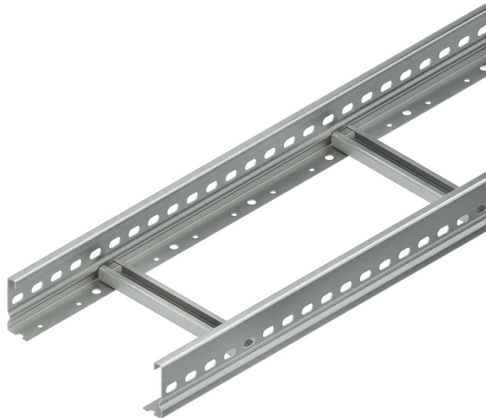

**Article Description**

Cable ladder, 60x300x3000 mm, t=1,5 mm, perforated, steel, pre-galvanised according to DIN EN 10346

**Additional Price Information**

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

**Weight**

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 2,765 kg / m  |
| Weight in kg per 100     | 276 kg / 100m |

# Technical Datasheet

## Cable Ladder System

KL 60.303/3

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 300 mm   |
| Depth/length | 3000 mm  |

### Packing Dimension

|                           |         |                                     |          |        |          |
|---------------------------|---------|-------------------------------------|----------|--------|----------|
| <b>3 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          |        |          |
| Lenght                    | 3000 mm | Width                               | 300 mm   | Height | 60.00 mm |
| Gross weight              | 8,29 kg | Volume                              | 0,054 m³ |        |          |
| Min. quantity             | 3.00 m  | Max. Quantity                       | 3.00 m   |        |          |

### Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 11 mm slot width.  
Corresponding U-clamps: BA... and BAK...  
Dimensions (approx. dimensions)  
Height H x Width W : 60 x 300 mm  
Material thickness side rail : 1.5 mm  
Rung distance : 300 mm  
Side rail perforation : 9 x 15 mm  
Center distance : 25 mm  
Base perforation : Ø 8.5 mm and Ø 5.4 mm  
Center distance : 100 mm and 50 mm  
Delivery length L : 3000 mm  
Transport length : 3000 mm + W  
Usable cross-section : 12850 mm²  
Material : Steel, pre-galvanised acc. to DIN EN 10346  
NIEDAX Model No.: KL 60.303/3  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tariff number   | 73089059 |

# Technical Datasheet

## Cable Ladder System

KL 60.303/3

the photorealistic images are to be considered as reference images

### Related items

#### Cover

| Model No. | Description                                                                                                                |
|-----------|----------------------------------------------------------------------------------------------------------------------------|
| RD 300    | Cover for cable tray/-ladder, with joint strip, 302x3000 mm, steel, pre-galvanised according to DIN EN 10346               |
| RDRS 9    | Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, pre-galvanised according to DIN EN 10346, incl. accessories |
| RDV 300   | Cover for cable tray/-ladder, with joint strip, 302x3000 mm, steel, pre-galvanised according to DIN EN 10346               |

#### Barrier strip

| Model No. | Description                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------|
| KLWC 11   | Barrier strip fastening clamp, for 11 mm slot width, steel, pre-galvanised according to DIN EN 10346, incl. accessories |
| RW 35     | Barrier strip, 30x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories                |

#### Connector

| Model No. | Description                                                                                                     |
|-----------|-----------------------------------------------------------------------------------------------------------------|
| KSV 60 S  | Splice plate for cable ladder, height 60 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories |