

Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles, with riveted, upwardly open rungs made of C-profiles with 11 mm slot width

KL 60.503




EAN Code: 4013339288304

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

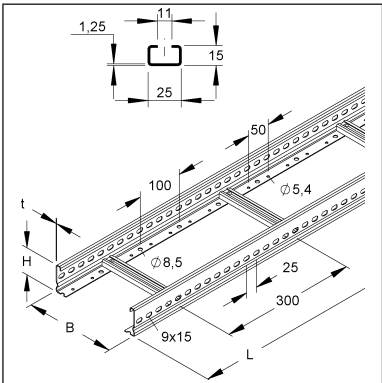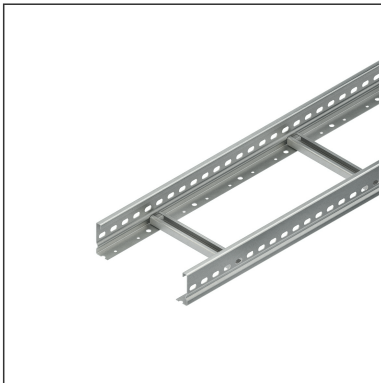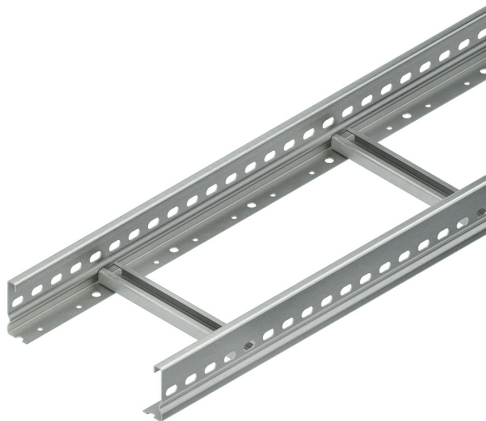

Article Description

Cable ladder, 60x500x6000 mm, t=1,5 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,160 kg / m
Weight in kg per 100	316 kg / 100m

Technical Datasheet

Cable Ladder System

KL 60.503


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	500 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

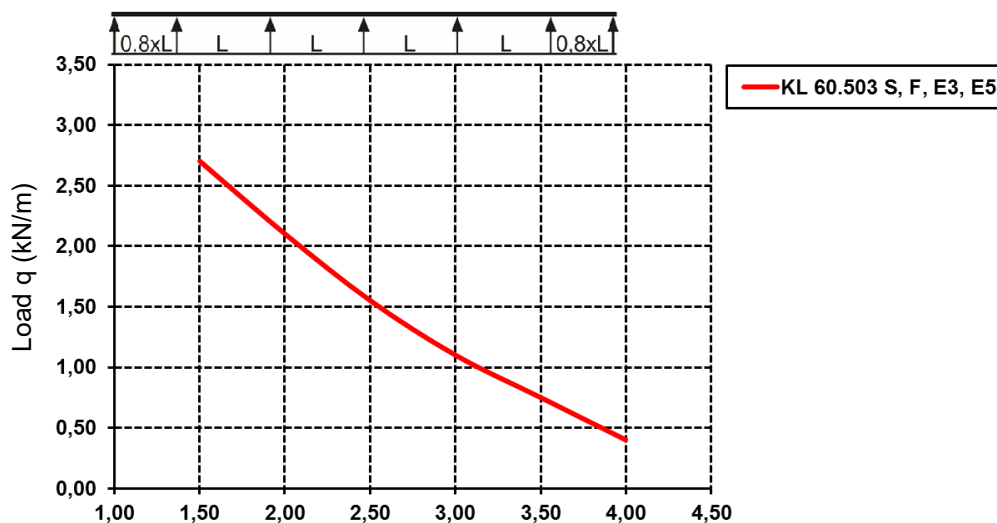

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	500 mm	Height	60.00 mm
Gross weight	19 kg	Volume	0,180 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 11 mm slot width.

Corresponding U-clamps: BA... and BAK...

Dimensions (approx. dimensions)

Height H x width W : 60 x 500 mm

Material thickness side rail : 1.5 mm

Rung distance : 300 mm

Side rail perforation : 9 x 15 mm

Center distance : 25 mm

Base perforation : Ø 8.5 and Ø 5.4 mm

Center distance : 100 mm and 50 mm

Delivery length L : 6000 mm

Transport length : 6000 mm + W

Usable cross-section : 21550 mm²

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No.: KL 60.503

Technical Datasheet

Cable Ladder System

KL 60.503

the photorealistic images are to be considered as reference images

Tender Text

EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 500	Cover for cable tray/-ladder, with joint strip, 502x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDRS 9	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RDV 500	Cover for cable tray/-ladder, with joint strip, 502x3000 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
KLWC 11	Barrier strip fastening clamp, for 11 mm slot width, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 35	Barrier strip, 30x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Connector

Model No.	Description
KSV 60 S	Splice plate for cable ladder, height 60 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories