


Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles

STL 60.403/3

EAN Code: 4013339921140
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

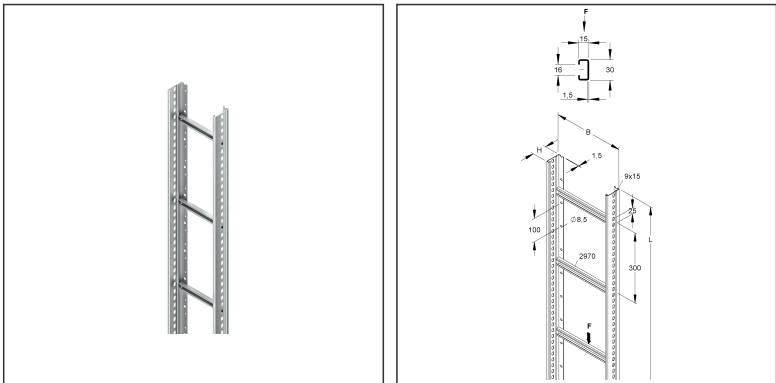

Article Description

Vertical cable ladder, 60x400x3000 mm, rung distance 300 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,181 kg / m
Weight in kg per 100	318 kg / 100m

Technical Datasheet

Vertical Cable Ladder System

STL 60.403/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	399 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	399 mm	Height	60.00 mm
Gross weight	9,54 kg	Volume	0,072 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

144 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	556 kg	Volume	3,904 m³		
Min. Quantity	144.00 m	Max. Quantity	144.00 m		

Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 16 mm slot width.

Corresponding U-clamps: B... and BK...

Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions)

Height H x Width W : 60 x 400 mm

Material thickness side rail : 1.5 mm

Rung distance : 300 mm

Side rail perforation : 9 x 15 mm

Center distance : 25 mm

Base perforation : Ø 8.5 mm and Ø 5.4 mm

Center distance : 100 mm and 50 mm

Load capacity with B/2 : 1.0 kN

Delivery length L : 3000 mm

Usable cross section : 17200 mm²

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : STL 60.403/3

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Vertical Cable Ladder System

STL 60.403/3

the photorealistic images are to be considered as reference images

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 400 S	Vertical cable ladder cover, 203x409x3000 mm, wall mounting, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Barrier strip

Model No.	Description
KLWC 16	Barrier strip fastening clamp, for 16 mm slot width, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 35	Barrier strip, 30x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Connector

Model No.	Description
KLVB 60/4	Splice plate, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
KSV 60 S	Splice plate for cable ladder, height 60 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories