


Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles

STM 60.203/3 F

EAN Code: 4013339586622
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

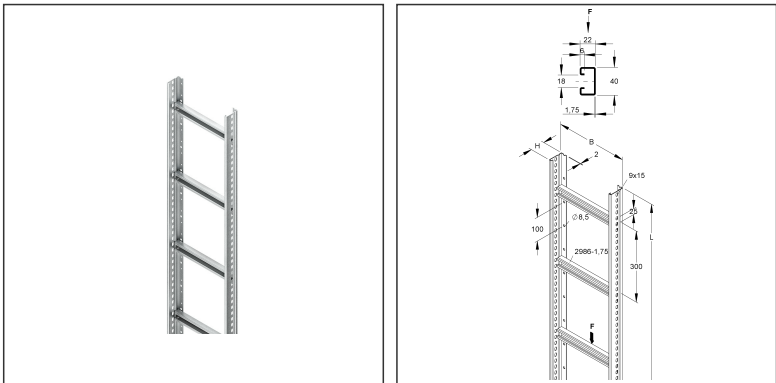

Article Description

Vertical cable ladder, 60x200x3000 mm, rung distance 300 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	4,159 kg / m
Weight in kg per 100	416 kg / 100m

Physical Article Dimensions

Height	60.00 mm
Width	199.00 mm
Depth/length	3000 mm

Technical Datasheet

Vertical Cable Ladder System

STM 60.203/3 F

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	199.00 mm	Height	60.00 mm
Gross weight	12 kg	Volume	0,036 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 18 mm slot width. Corresponding U-clamps: BU... and BUK...
Please observe additional regulations for use in functional maintenance!
Dimensions (approx. dimensions)
Height H x width W : 60 x 200 mm
Material thickness side rail : 2 mm
Rung distance : 300 mm
Side rail perforation : 9 x 15 mm
Center distance : 25 mm
Base perforation : Ø 8.5 mm
Center distance : 100 mm
Load capacity with B/2 : 1.75 kN
Delivery length L : 3000 mm
Usable cross-section : 7000 mm²
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : STM 60.203/3 F
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 200 F	Vertical cable ladder cover, 203x209x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Vertical Cable Ladder System

STM 60.203/3 F

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
KLWC 18 F	Barrier strip fastening clamp, for 18 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
KLVB 60/4	Splice plate, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
KSV 60 F	Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories