


Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles

STM 60.303/3 F

EAN Code: 4013339586646  
Smallest packaging unit: 3 m  
quantity unit: m M

the photorealistic images are to be considered as reference images

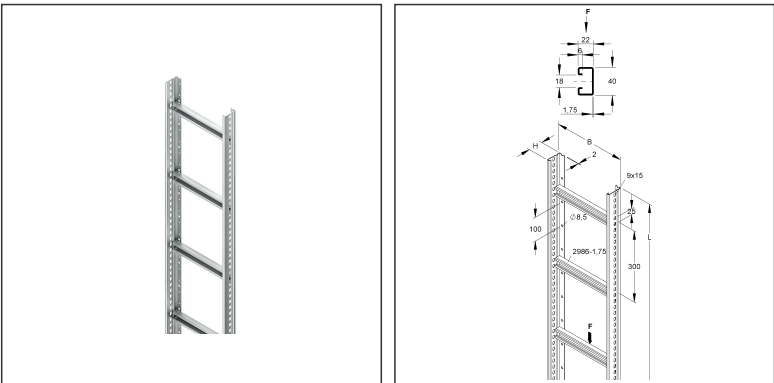

Article Description

Vertical cable ladder, 60x300x3000 mm, rung distance 300 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 4,678 kg / m  |
| Weight in kg per 100     | 468 kg / 100m |

Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 299 mm   |
| Depth/length | 3000 mm  |

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.303/3 F

the photorealistic images are to be considered as reference images

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>3 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 3000 mm | Width                               | 299 mm   | Height             | 60.00 mm |
| Gross weight              | 14 kg   | Volume                              | 0,054 m³ |                    |          |
| Min. quantity             | 3.00 m  | Max. Quantity                       | 3.00 m   |                    |          |

### Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 18 mm slot width. Corresponding U-clamps: BU... and BUK...  
Please observe additional regulations for use in functional maintenance!  
Dimensions (approx. dimensions)  
Height H x width W : 60 x 300 mm  
Material thickness side rail : 2 mm  
Rung distance : 300 mm  
Side rail perforation : 9 x 15 mm  
Center distance : 25 mm  
Base perforation : Ø 8.5 mm  
Center distance : 100 mm  
Load capacity with B/2 : 1.75 kN  
Delivery length L : 3000 mm  
Usable cross-section : 10600 mm<sup>2</sup>  
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461  
NIEDAX Model No. : STM 60.303/3 F  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

### Related items

#### Cover

| Model No.   | Description                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------|
| RDHFS 9 VZL | Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate                                       |
| STVW 300 F  | Vertical cable ladder cover, 203x309x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.303/3 F

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

| Model No. | Description                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| KLWC 18 F | Barrier strip fastening clamp, for 18 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| RW 35 F   | Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories                |

#### Connector

| Model No. | Description                                                                                               |
|-----------|-----------------------------------------------------------------------------------------------------------|
| KLVB 60/4 | Splice plate, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories                                |
| KSV 60 F  | Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |