


Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles

STM 60.603/6 E3

EAN Code: 4013339906697  
 Smallest packaging unit:6 m  
 quantity unit:m M

the photorealistic images are to be considered as reference images

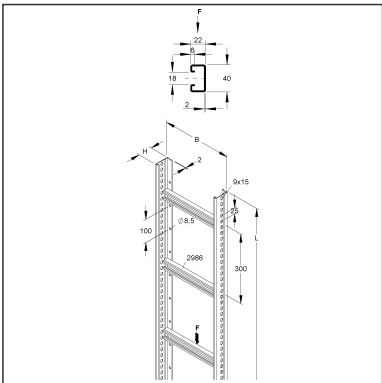

Article Description

Vertical cable ladder, 60x600x6000 mm, rung distance 300 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 6,037 kg / m  |
| Weight in kg per 100     | 604 kg / 100m |

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.603/6 E3

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 599 mm   |
| Depth/length | 6000 mm  |

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 6000 mm | Width                               | 599 mm   | Height             | 60.00 mm |
| Gross weight              | 36 kg   | Volume                              | 0,216 m³ |                    |          |
| Min. quantity             | 6.00 m  | Max. Quantity                       | 6.00 m   |                    |          |

### Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 18 mm slot width. Corresponding U-clamps: BU...

Dimensions (approx. dimensions)

Height H x width W : 60 x 600 mm

Material thickness side rail : 2 mm

Rung distance : 300 mm

Side rail perforation : 9 x 15 mm

Center distance : 25 mm

Base perforation : Ø 8.5 mm

Center distance : 100 mm

Load capacity with B/2 : 1.75 kN

Delivery length L : 6000 mm

Usable cross-section : 21400 mm<sup>2</sup>

Material : stainless steel, material no. 1.4301, AISI 304

NIEDAX Model No. : STM 60.603/6 E3

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

# Technical Datasheet

## Vertical Cable Ladder System

STM 60.603/6 E3

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

| Model No. | Description                                                                                              |
|-----------|----------------------------------------------------------------------------------------------------------|
| GRSM 6 E3 | Hook bolt, thread M6, with toothed flange nut, Ø 16 mm, stainless steel, material code: 1.4301, AISI 304 |
| RW 35 E3  | Barrier strip, 30x3000 mm, t=0,8 mm, stainless steel, material code: 1.4301, AISI 304, incl. accessories |

#### Connector

| Model No. | Description                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------|
| KSV 60 E3 | Splice plate for cable ladder, height 60 mm, stainless steel, mat. code: 1.4301, AISI 304, washed,incl. accessories |