


Vertical Cable Ladder

rung spacing 600 mm, with continuously perforated side profiles

STM 60.306/6 E3

EAN Code: 4013339906710
Smallest packaging unit: 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

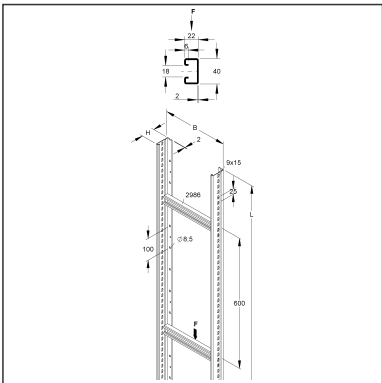

Article Description

Vertical cable ladder, 60x300x6000 mm, rung distance 600 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,658 kg / m
Weight in kg per 100	366 kg / 100m

Technical Datasheet

Vertical Cable Ladder System

STM 60.306/6 E3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	299 mm
Depth/length	6000 mm

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	299 mm	Height	60.00 mm
Gross weight	22 kg	Volume	0,108 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Vertical cable ladder according to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 18 mm slot width. Corresponding U-clamps: BU... and BUK...

Dimensions (approx. dimensions)

Height H x width W : 60 x 300 mm

Material thickness side rail : 2 mm

Rung distance: : 600 mm

Side rail perforation : 9 x 15 mm

Center distance : 25 mm

Base perforation : Ø 8.5 mm

Center distance : 100 mm

Load capacity with B/2 : 1.75 kN

Delivery length L : 6000 mm

Usable cross-section : 10600 mm²

Material : Stainless steel, material no. 1.4301, AISI 304

NIEDAX Model no. : STM 60.306/6 E3

EP Material_____ EP Wage_____

Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Vertical Cable Ladder System

STM 60.306/6 E3

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
GRSM 6 E3	Hook bolt, thread M6, with toothed flange nut, Ø 16 mm, stainless steel, material code: 1.4301, AISI 304
RW 35 E3	Barrier strip, 30x3000 mm, t=0,8 mm, stainless steel, material code: 1.4301, AISI 304, incl. accessories

Connector

Model No.	Description
KSV 60 E3	Splice plate for cable ladder, height 60 mm, stainless steel, mat. code: 1.4301, AISI 304, washed,incl. accessories