


Floor Mounting

MIABK 600 F

EAN Code: 4013339907922

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

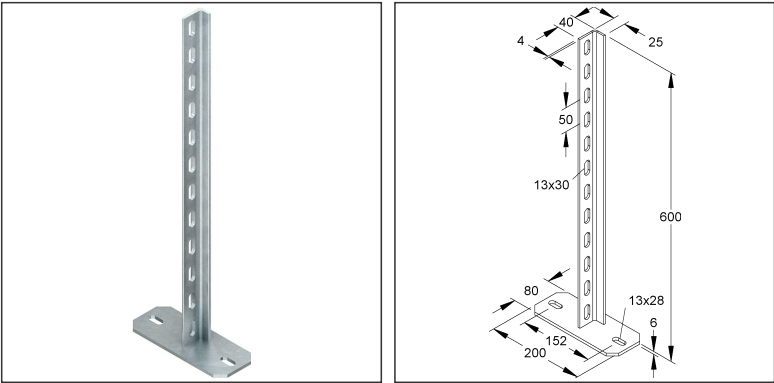

Article Description

Bottom connection, height 600 mm, mounting with coupling, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,830 kg / pcs.
Weight in kg per 100	183 kg / 100pcs.

Physical Article Dimensions

Height	606 mm
Width	200.00 mm
Depth/length	80.00 mm

Technical Datasheet

Machine installation conduit

MIABK 600 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	80.00 mm	Width	200.00 mm	Height	606 mm
Gross weight	1,83 kg	Volume	0,010 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Floor connection, continuous perforated L-profile with welded-on top plate, for floor connection of cable protection tubes by means of MIK coupling... and MIKG....

Used for : machine installation conduit MI 30... / MI 60...

machine installation conduit MIG 60...

installation conduit connection MIA 60...

Dimensions (approx. dimensions)

Top plate L x W x d : 200 x 80 x 6 mm

Fastening holes : 13 x 28 mm

central distance : 152 mm

L-profile : 40 x 25 mm

Material thickness d : 4 mm

Profile holes, single row : 13 x 30 mm

central distance : 50 mm

Total height H : 606 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model-No. : MIABK 600 F

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079210