

Extension T-Piece



with unperforated side profiles, but with connector perforations

KLMUAT 40.1000 F

EAN Code: 4013339935338

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

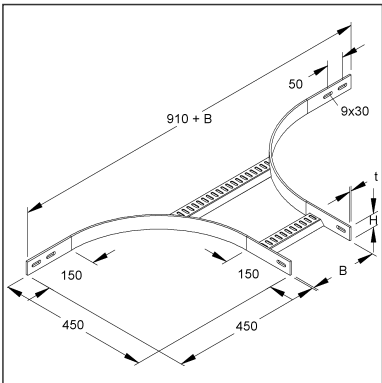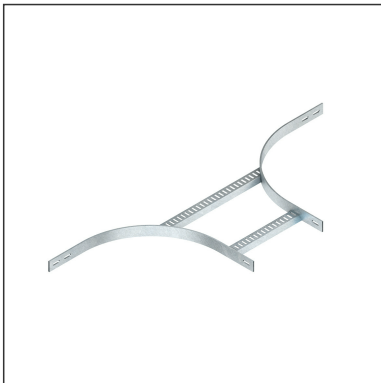

Article Description

Extension T-piece , 40x1000 mm, t=5,0 mm, steel, hot dip galvanised DIN EN ISO 1461

Excl. Accessories

exclusive bolting

Please order the necessary fastening accessories separately: FLM 8X25 F

Additional Price Information

Article group

N13

quantity unit

pcs.

Weight

Weight per quantity unit

4,904 kg / pcs.

Weight in kg per 100

490 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KLMUAT 40.1000 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

| | |
|--------------|----------|
| Height | 40.00 mm |
| Width | 455 mm |
| Depth/length | 1910 mm |

Packing Dimension

| | | | | | |
|--------------------------|-----------|-------------------------------------|-----------|--------|----------|
| 1 piece = 1 piece | | ✓ VP1-smallest packaging unit (PU) | | | |
| Lenght | 1910 mm | Width | 455 mm | Height | 40.00 mm |
| Gross weight | 4,9 kg | Volume | 0,035 m³ | | |
| Min. quantity | 1.00 pcs. | Max. Quantity | 1.00 pcs. | | |

Tender Text

Extension T-piece, with unperforated side rails, with connection perforation for the connection and welded-in, trapezoidal perforated rungs, for creating 90° T-outlets as well as, when using 2 extension T-pieces, for creating horizontal 90° crossings, stepless attachment option to the continuously perforated marine cable ladder KLMUL 40.... as well as direct fastening of the marine cable ladder for the T-shaped connection, please order hot-dip galvanised proportional fastening accessories for the connection separately.

Used for : Marine cable ladder/vertical cable ladder KLMUL 40...

Dimensions (approx. dimensions)

Height H x width W (inside) : 40 x 1000 mm

Material thickness t : 5 mm

Length of cable ladder : 910 mm + W

Length in outgoing direction : 455 mm

Inner radius R : 300 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model no. : KLMUAT 40.1000 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

| | |
|------------|-------------|
| REACH Date | 25.06.2025 |
| REACH Info | Conformable |
| RoHS Info | Conformable |

Origin & International Trade

| | |
|-------------------------|----------|
| Country of origin | DE |
| Federal State of Origin | RP |
| Customs tariff number | 73089059 |