


Extension T-Piece

with unperforated side profiles, but with connector perforations

KLMUAT 40.200 F

EAN Code: 4013339935246  
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

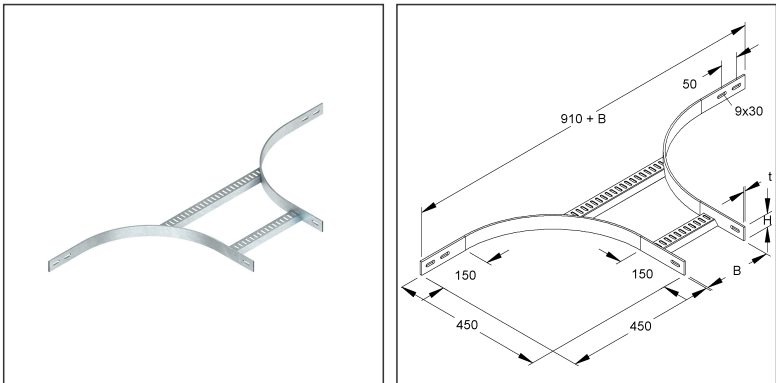

Article Description

Extension T-piece , 40x200 mm, t=5,0 mm, steel, hot dip galvanised DIN EN ISO 1461

Excl. Accessories

exclusive bolting      Please order the necessary fastening accessories separately: FLM 8X25 F

Additional Price Information

Article group      N13  
quantity unit      pcs.

Weight

Weight per quantity unit      3,208 kg / pcs.  
Weight in kg per 100      321 kg / 100pcs.

# Technical Datasheet

## Cable Ladder System

### KLMUAT 40.200 F

the photorealistic images are to be considered as reference images

#### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 40.00 mm |
| Width        | 455 mm   |
| Depth/length | 1110 mm  |

#### Packing Dimension

|                          |           |                                     |           |        |          |
|--------------------------|-----------|-------------------------------------|-----------|--------|----------|
| <b>1 piece = 1 piece</b> |           | ✓ VP1-smallest packaging unit ( PU) |           |        |          |
| Lenght                   | 1110 mm   | Width                               | 455 mm    | Height | 40.00 mm |
| Gross weight             | 3,21 kg   | Volume                              | 0,020 m³  |        |          |
| Min. quantity            | 1.00 pcs. | Max. Quantity                       | 1.00 pcs. |        |          |

#### Tender Text

Extension T-piece, with unperforated side rails, with connection perforation for the connection and welded-in, trapezoidal perforated rungs, for creating 90° T-outlets as well as, when using 2 extension T-pieces, for creating horizontal 90° crossings, stepless attachment option to the continuously perforated marine cable ladder KLMUL 40.... as well as direct fastening of the marine cable ladder for the T-shaped connection, please order hot-dip galvanised proportional fastening accessories for the connection separately.

Used for : Marine cable ladder/vertical cable ladder KLMUL 40...

Dimensions (approx. dimensions)

Height H x width W (inside) : 40 x 200 mm

Material thickness t : 5 mm

Length of cable ladder : 910 mm + W

Length in outgoing direction : 455 mm

Inside radius R : 300 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model no. : KLMUAT 40.200 F

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

#### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

#### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tariff number   | 73089059 |