

T-Piece




made of oval, closed tubular profile bars and welded, downward open, perforated C-profiles

KRCT 60.625 F

EAN Code: 4013339850105

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

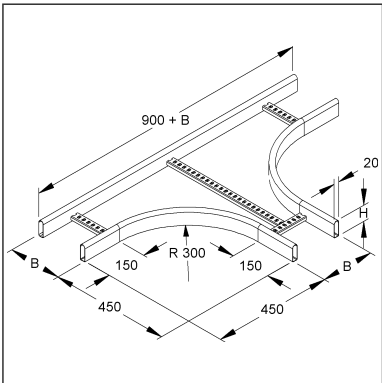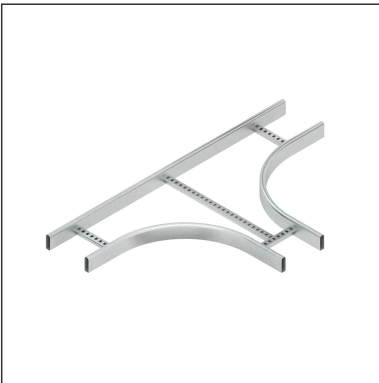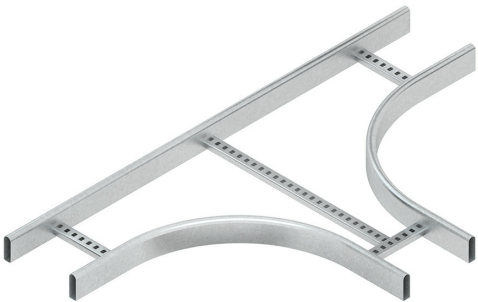

Article Description

T-piece , 60x600 mm, with perforated C-profiles, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	6,654 kg/ pcs.
Weight in kg per 100	665 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KRCT 60.625 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	1050 mm
Depth/length	1500 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1500 mm	Width	1050 mm	Height	60.00 mm
Gross weight	6,65 kg	Volume	0,094 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

T-piece, side beams made of hollow sections, with welded-in C-section rungs open at the bottom, with 16 mm slot width and continuous perforation, for creating horizontal 90° T-outlets. Please order splice plate KRLV 60 F separately. for Allround cable ladder : KRC...

Dimensions (approx. dimensions) H x W : 60 x 600 mm Length in main direction : 900 mm + B Length in outgoing direction : 450 mm + B Inner beam radius R : 300 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KRCT 60.625 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
KRLV 60 F	Splice plate, steel, hot dip galvanised DIN EN ISO 1461