
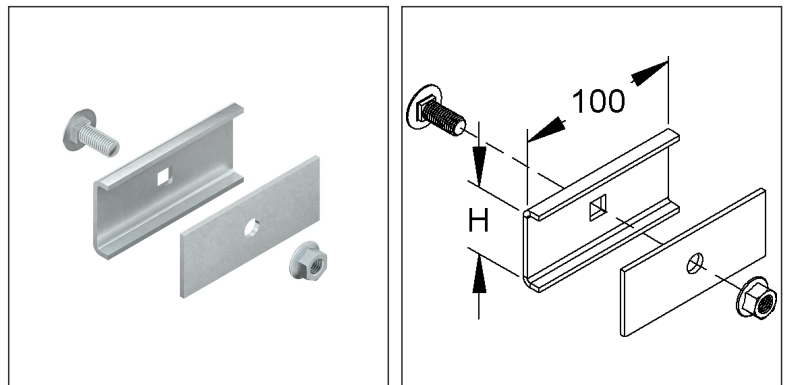


Splice Plate

KLMV 40

EAN Code: 4013339298808
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

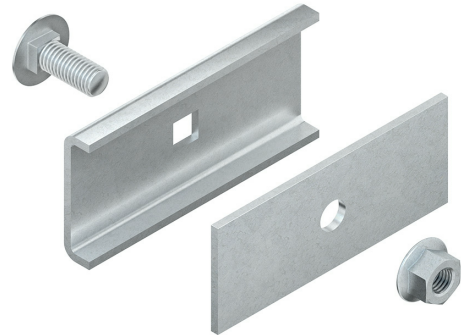

Article Description

Splice plate, height 41 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 FLM 10X25 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	297 g / pcs.
Weight in kg per 100	30 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KLMV 40

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	47.00 mm
Width	25.00 mm
Depth/length	100.00 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	6,13 kg	Volume	0,003 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

840 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	298 kg	Volume	0,411 m³		
Min. Quantity	840.00 pcs.	Max. Quantity	840.00 pcs.		

Tender Text

Splice plate, for a form-fitting, longitudinally aligned connection of the cable ladder/vertical cable ladder, including proportional fastening accessories in hot-dip galvanised. The equipotential bonding takes place through the screw connection of the side beams.

Used for : marine cable ladder/ vertical cable ladder KLMUL 40...

Requirement : 2 pieces per joint

Dimensions (approx. dimensions)

Height H x width W : 41 x 100 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KLMV 40

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059