


Splice Plate

KSV 60 F

EAN Code: 4013339289882
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

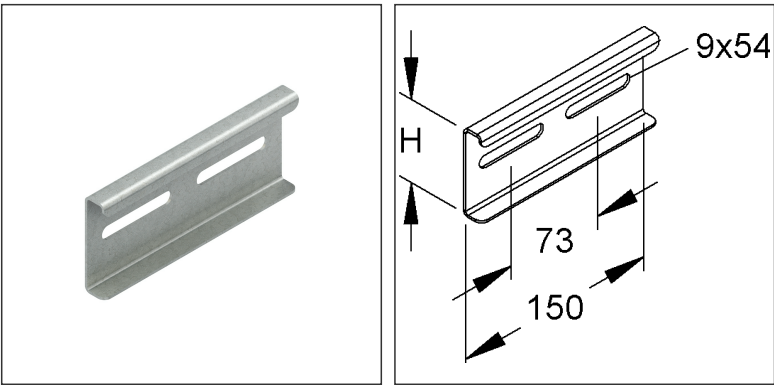

Article Description

Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 8X13 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	237 g/ pcs.
Weight in kg per 100	24 kg/ 100pcs.

Technical Datasheet

Cable Ladder System

KSV 60 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	64.00 mm
Width	15.00 mm
Depth/length	150.00 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	4,92 kg	Volume	0,003 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

3240 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	812 kg	Volume	0,960 m³		
Min. Quantity	3.240.00 pcs.	Max. Quantity	3.240.00 pcs.		

Tender Text

Splice plate, to create a positive, longitudinally aligned connection, including proportional fastening accessories in hot-dip galvanised. The equipotential bonding is achieved by screwing it to the cable ladder and fitting beams. Can be used for : cable ladders, their fittings and vertical cable ladders with an edge height of 60 mm

Requirement : 2 pieces per joint Dimensions (approx. dimensions) H x L : 60 x 150 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KSV 60 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059