


Splice Plate

KSV 60 S

EAN Code: 4013339289875
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

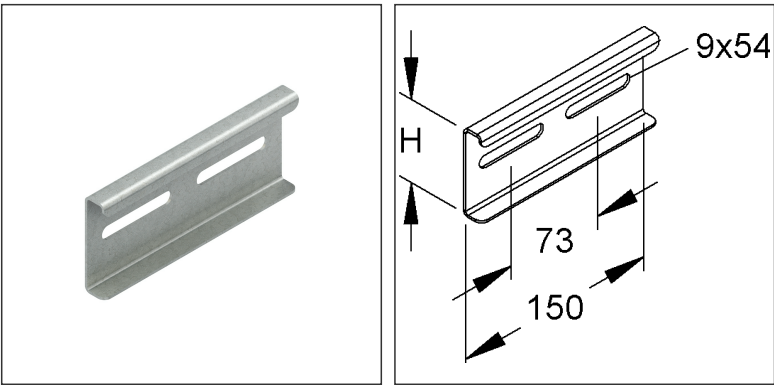

Article Description

Splice plate for cable ladder, height 60 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Incl. accessories

2 FLM 8X13 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	219 g / pcs.
Weight in kg per 100	22 kg / 100pcs.

Technical Datasheet

Cable Ladder System

KSV 60 S

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	64.00 mm
Width	15.00 mm
Depth/length	150.00 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	4,56 kg	Volume	0,003 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

3240 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	754 kg	Volume	0,960 m³		
Min. Quantity	3.240.00 pcs.	Max. Quantity	3.240.00 pcs.		

Tender Text

Splice plate, to create a positive, longitudinally aligned connection, including proportional fastening accessories in hot-dip galvanised. The equipotential bonding is achieved by screwing it to the cable ladder and fitting beams. Can be used for : cable ladders, their fittings and vertical cable ladders with an edge height of 60 mm

Requirement : 2 pieces per joint Dimensions (approx. dimensions) H x L : 60 x 150 mm

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : KSV 60 S

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059