


C-Profile Type 2970

C-profile, slot width 16 mm, according to DIN EN 60715, with 2 end holes

2970/400-2 SL

EAN Code: 4013339037209
Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

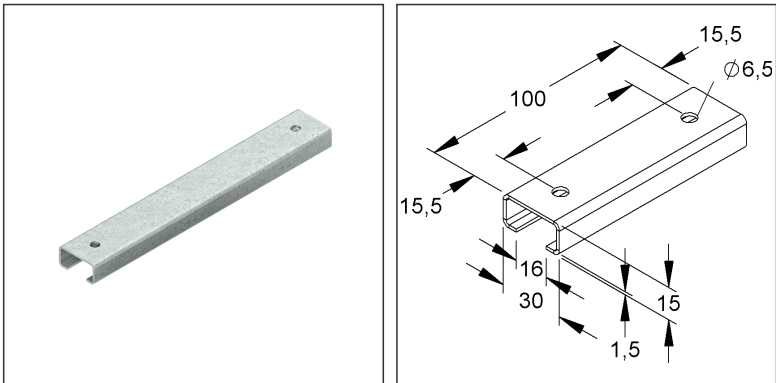

Article Description

C-profile, slot width 16 mm, 30x15x400 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	302 g / pcs.
Weight in kg per 100	30 kg / 100pcs.

Physical Article Dimensions

Height	15.00 mm
Width	30.00 mm
Depth/length	400 mm

Additional Price Information

Article group	N05
quantity unit	pcs.

Technical Datasheet

Niedax rails

2970/400-2 SL

the photorealistic images are to be considered as reference images

Packing Dimension

50 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	420 mm	Width	250 mm	Height	120.00 mm
Gross weight	16 kg	Volume	0,013 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

1750 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	561 kg	Volume	0,960 m³		
Min. Quantity	1.750.00 pcs.	Max. Quantity	1.750.00 pcs.		

Tender Text

C-profile model 2970 acc. to DIN EN 60715, with two end perforations. Suitable U-clamps (B... and BK...).	
The SKC 70 protective cap must be fitted in personal danger areas. To ensure that the protective cap can be fitted easily, a distance of at least 30 mm from the end of the profile must be left.	
Please observe additional regulations for use in functional maintenance!	
Dimensions (approx. dimensions)	
Height H x width W x material thickness t : 15 x 30 x 1.5 mm	
Slot width : 16 mm	
End holes : Ø 6.5 mm	
Distance to the profile ends : 15.5 mm	
Delivery length L : 400 mm	
Material : steel, pre-galvanised to DIN EN 10346	
NIEDAX Model No. : 2970/400-2 SL	
EP Material_____ EP Wage_____	
Unit price/piece	

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098