


C-Profile Type 2970

C-profile, slot width 16 mm, according to DIN EN 60715, with 2 end holes

2970/500-2 SL

EAN Code: 4013339037704
Smallest packaging unit: 25 pcs.

the photorealistic images are to be considered as reference images

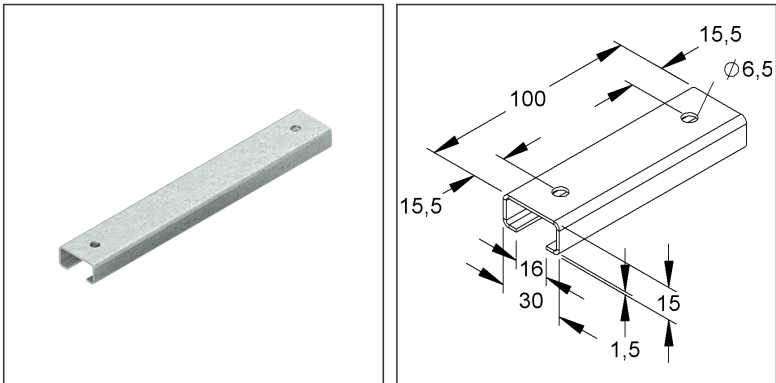

Article Description

C-profile, slot width 16 mm, 30x15x500 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	377 g / pcs.
Weight in kg per 100	38 kg / 100pcs.

Physical Article Dimensions

Height	15.00 mm
Width	30.00 mm
Depth/length	500 mm

Additional Price Information

Article group	N05
quantity unit	pcs.

Technical Datasheet

Niedax rails

2970/500-2 SL

the photorealistic images are to be considered as reference images

Packing Dimension

25 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	500 mm	Width	30.00 mm	Height	15.00 mm
Gross weight	9,41 kg	Volume	0,000 m³		
Min. quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

1500 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	580 kg	Volume	0,960 m³		
Min. Quantity	1.500.00 pcs.	Max. Quantity	1.500.00 pcs.		

Tender Text

C-profile model 2970 acc. to DIN EN 60715, with two end perforations. Suitable U-clamps (B... and BK...).
The SKC 70 protective cap must be fitted in personal danger areas. To ensure that the protective cap can be fitted easily, a distance of at least 30 mm from the end of the profile must be left.
Please observe additional regulations for use in functional maintenance!
Dimensions (approx. dimensions)
Height H x width W x material thickness t : 15 x 30 x 1.5 mm
Slot width : 16 mm
End holes : Ø 6.5 mm
Distance to the profile ends : 15.5 mm
Delivery length L : 500 mm
Material : steel, pre-galvanised to DIN EN 10346
NIEDAX Model No. : 2970/500-2 SL
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098