


## C-Profile Type 2986

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/100 E3L

EAN Code: 4013339900060  
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

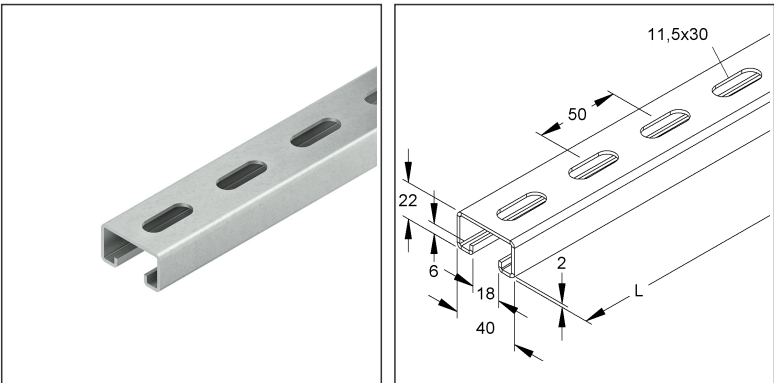

### Article Description

C-profile, slot width 18 mm, 40x22x100 mm, perforated, stainless steel, material code: 1.4301, 1.4303, AISI 304

### Weight

|                          |                 |
|--------------------------|-----------------|
| Weight per quantity unit | 150 g / pcs.    |
| Weight in kg per 100     | 15 kg / 100pcs. |

### Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 22.00 mm  |
| Width        | 40.00 mm  |
| Depth/length | 100.00 mm |

# Technical Datasheet

## Niedax rails

2986/100 E3L

the photorealistic images are to be considered as reference images

### Additional Price Information

|               |      |
|---------------|------|
| Article group | N05  |
| quantity unit | pcs. |

### Packing Dimension

|                             |            |                                                        |            |        |          |
|-----------------------------|------------|--------------------------------------------------------|------------|--------|----------|
| <b>20 pieces = 1 carton</b> |            | ✓ VP1-smallest packaging unit ( PU) ✓ VP1-preferred PU |            |        |          |
| Lenght                      | 205 mm     | Width                                                  | 120.00 mm  | Height | 80.00 mm |
| Gross weight                | 3,14 kg    | Volume                                                 | 0,002 m³   |        |          |
| Min. quantity               | 20.00 pcs. | Max. Quantity                                          | 20.00 pcs. |        |          |

|                               |               |               |               |        |         |
|-------------------------------|---------------|---------------|---------------|--------|---------|
| <b>5600 pieces = 1 pallet</b> |               |               |               |        |         |
| Lenght                        | 1200 mm       | Width         | 800 mm        | Height | 1000 mm |
| Gross weight                  | 894 kg        | Volume        | 0,960 m³      |        |         |
| Min. Quantity                 | 5.600.00 pcs. | Max. Quantity | 5.600.00 pcs. |        |         |

### Tender Text

C-profile model 2986 to DIN EN 60715, perforated, for bracket clip fastening in walkable cable trays as riser duct.  
Suitable U clamps (BU... and BUK...).

In personal hazard areas, the protective cap SKC 86 must be fitted. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be kept free.

Used for: walkable cable trays

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

central distance : 50 mm

Delivery length L : 100 mm

Material : stainless steel, material no. 1.4301, AISI 304

NIEDAX model no. : 2986/100 E3L

EP material\_\_\_\_\_ EP wage\_\_\_\_\_

Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73269098 |