


C-Profile Type 2986

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/100 SL

EAN Code: 4013339894680
Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

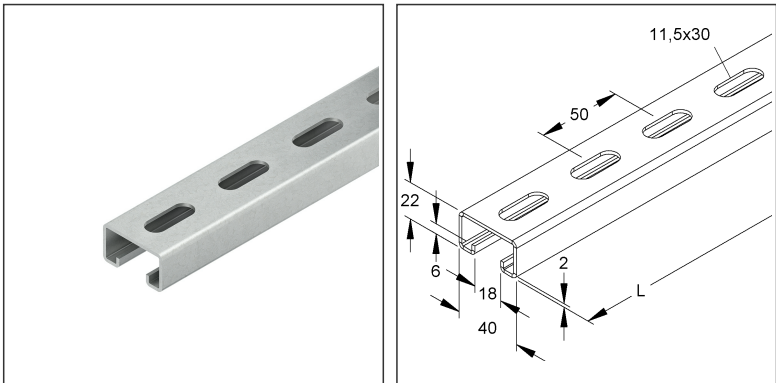

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x100 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	150 g/ pcs.
Weight in kg per 100	15 kg/ 100pcs.

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	100.00 mm

Technical Datasheet

Niedax rails

2986/100 SL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	pcs.

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	205 mm	Width	120.00 mm	Height	80.00 mm
Gross weight	3,12 kg	Volume	0,002 m ³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

5600 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	889 kg	Volume	0,960 m ³		
Min. Quantity	5.600.00 pcs.	Max. Quantity	5.600.00 pcs.		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated, for fastening brackets in walkable cable trays as vertical cable ladder.
Suitable clamps (BU... and BUK...).

The protective cap SKC 86 must be used in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Used for: walkable cable trays

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

centre distance : 50 mm

Delivery length L : 100 mm

Material : steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : 2986/100 SL

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098