

C-Profile Type 2986

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated


2986/2 SL

EAN Code: 4013339899722

Smallest packaging unit: 5 x 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

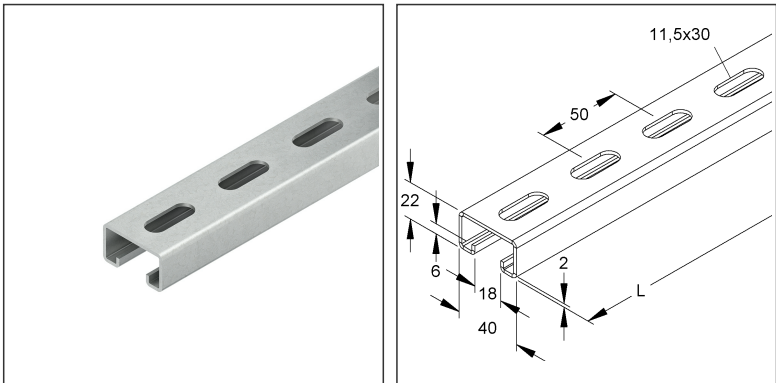

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x2000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	1,491 kg / m
Weight in kg per 100	149 kg / 100m

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2986/2 SL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	40.00 mm	Height	22.00 mm
Gross weight	2,98 kg	Volume	0,002 m ³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

10 meters = 1 bundle		✓ VP2-preferred PU			
Lenght	2000 mm	Width	75.00 mm	Height	60.00 mm
Gross weight	15 kg	Volume	0,009 m ³		
Min. Quantity	10.00 m	Max. Quantity	10.00 m		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Please observe additional regulations for use in functional maintenance!

The fastening of the C-profile to the building ground and the fastening distances can be found in the respective valid test certificate.

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

centre distance : 50 mm

Delivery length L : 2000 mm

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : 2986/2 SL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098