


C-Profile Type 2986

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/400 FL

EAN Code: 4013339873166
Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

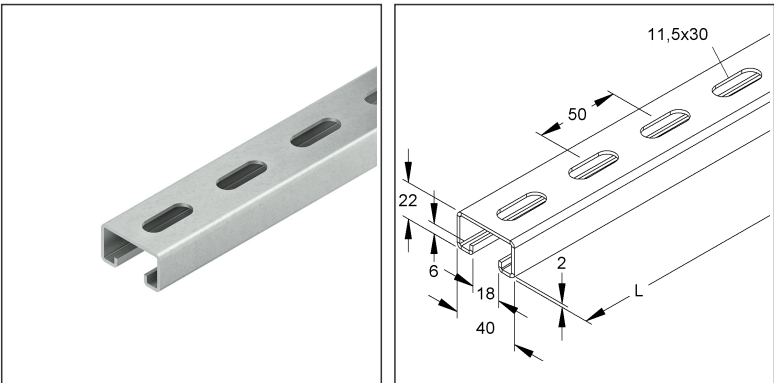

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x400 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	656 g / pcs.
Weight in kg per 100	66 kg / 100pcs.

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	400 mm

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Niedax rails

2986/400 FL

the photorealistic images are to be considered as reference images

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	520 mm	Width	140.00 mm	Height	100.00 mm
Gross weight	14 kg	Volume	0,007 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

1400 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	961 kg	Volume	0,960 m³		
Min. Quantity	1.400.00 pcs.	Max. Quantity	1.400.00 pcs.		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Please observe additional regulations for use in functional maintenance!

The fastening of the C-profile to the building ground and the fastening distances can be found in the respective valid test certificate.

Dimensions (approx. dimensions)
Height H x width W x material thickness t : 22 x 40 x 2 mm
Slot width : 18 mm
Profile perforation : 11.5 x 30 mm
centre distance : 50 mm
Delivery length L : 400 mm
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : 2986/400 FL
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098