

C-Profile Type 2986


C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/500 SL

EAN Code: 4013339894765

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

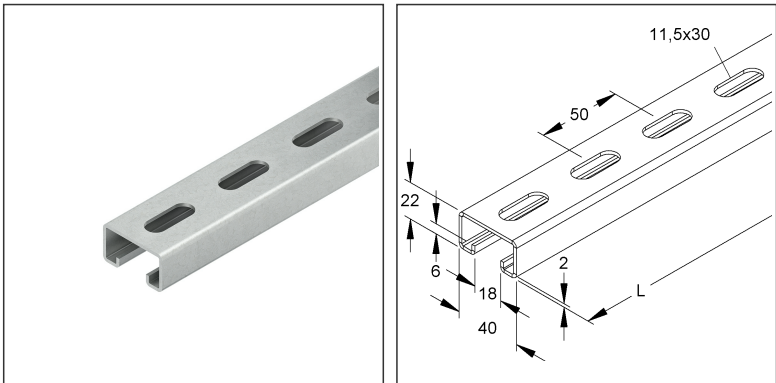

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x500 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	746 g / pcs.
Weight in kg per 100	75 kg / 100pcs.

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	500 mm

Technical Datasheet

Niedax rails

2986/500 SL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	pcs.

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	520 mm	Width	140.00 mm	Height	100.00 mm
Gross weight	15 kg	Volume	0,007 m ³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

1400 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	1086 kg	Volume	0,960 m ³		
Min. Quantity	1.400.00 pcs.	Max. Quantity	1.400.00 pcs.		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated, for fastening brackets in walkable cable trays as vertical cable ladders.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be used in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Used for: walkable cable tray

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

centre distance : 50 mm

Delivery length L : 500 mm

Material : steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : 2986/500 SL

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098