


C-Profile Type 2986

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/900 SL

EAN Code: 4013339899715
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

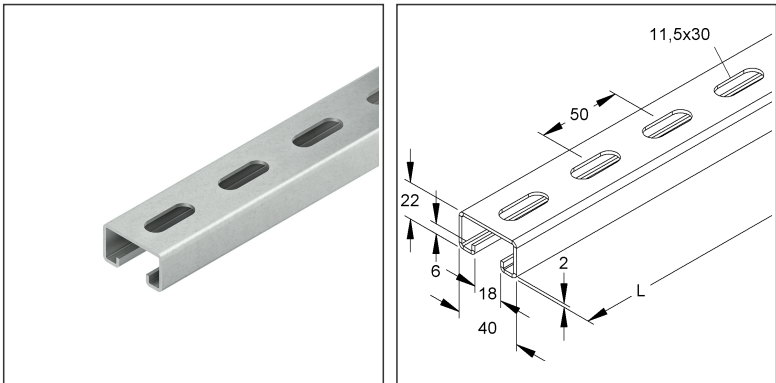

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x900 mm, perforated, steel, mill gal., acc. DIN EN 10346

Weight

Weight per quantity unit	1,342 kg/ pcs.
Weight in kg per 100	134 kg/ 100pcs.

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	900 mm

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Niedax rails

2986/900 SL

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	900 mm	Width	40.00 mm	Height	22.00 mm
Gross weight	1,34 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated, for fastening brackets in walkable cable trays as vertical cable ladders.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be used in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Used for: walkable cable tray

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

centre distance : 50 mm

Delivery length L : 900 mm

Material : steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : 2986/900 SL

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098