


C-Profile Type 2986

C-profile, slot width 18 mm, similar to DIN EN 60715, perforated

2986-1.75/2 SL

EAN Code: 4013339043965
Smallest packaging unit: 5 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

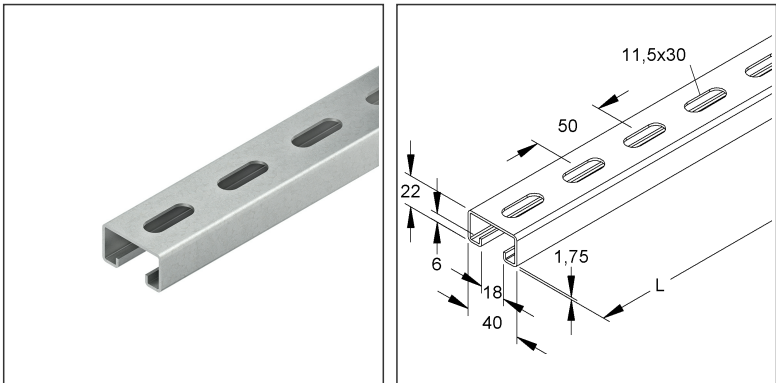

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x2000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	1,330 kg/ m
Weight in kg per 100	133 kg/ 100m

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2986-1.75/2 SL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

10 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2000 mm	Width	75.00 mm	Height	60.00 mm
Gross weight	13 kg	Volume	0,009 m³		
Min. quantity	10.00 m	Max. Quantity	10.00 m		

750 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	1056 kg	Volume	1,309 m³		
Min. Quantity	750.00 m	Max. Quantity	750.00 m		

Tender Text

C-profile model 2986 to DIN EN 60715, perforated.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)
Height H x width W x material thickness t : 22 x 40 x 1.75 mm
Slot width : 18 mm
Profile perforation : 11.5 x 30 mm
centre distance : 50 mm
Delivery length L : 2000 mm
Material : steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model No. : 2986-1.75/2 SL
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098