



C-Profile Type 2988

C-profile, slot width 18 mm, perforated

2988/6 FL

EAN Code: 4013339045013
Smallest packaging unit: 2 x 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

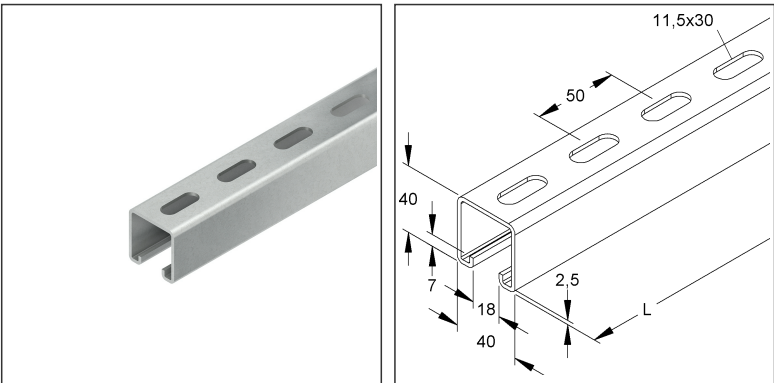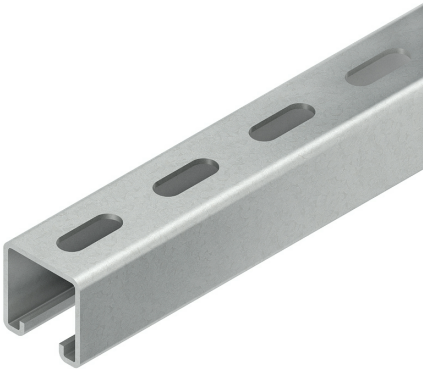

Article Description

C-profile, C-profile, slot width 18 mm, 40x40x6000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	2,764 kg / m
Weight in kg per 100	276 kg / 100m

Physical Article Dimensions

Height	40.00 mm
Width	40.00 mm
Depth/length	6000 mm

Additional Price Information

Article group	N05
quantity unit	m

Technical Datasheet

Niedax rails

2988/6 FL

the photorealistic images are to be considered as reference images

Packing Dimension

12 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	50.00 mm	Height	60.00 mm
Gross weight	33 kg	Volume	0,018 m³		
Min. quantity	12.00 m	Max. Quantity	12.00 m		

Tender Text

C-profilemodel 2988, perforated. Suitable U-clamps (BU... and BUK...).
The protective cap SKC 88/96 must be fitted in personal danger areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.
Dimensions (approx. dimensions)
Height H x width W x material thickness t : 40 x 40 x 2.5 mm
Slot width : 18 mm
Profile perforation : 11.5 x 30 mm
central distance : 50 mm
Delivery length L : 2000 mm
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : 2988/6 FL
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098